



Malli F1205


DIN 327D HSSCO8%

- 2-leikkuinen Z2
- Poraava
- Weldon varsi
- Urajyrsintä
- Viimeistely

- Leikkumuoto
- Normi
- Nousukulma
- Leikkukulma



N
DIN 327D
30°
12°

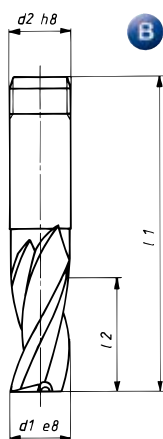

Tuotenro:	d1 mm	d2 mm	l2 mm	l1 mm
F1205-1,5	1,5	6	3,0	47,0
F1205-2	2,0	6	4,0	48,0
F1205-2,5	2,5	6	5,0	49,0
F1205-3	3,0	6	5,0	49,0
F1205-3,5	3,5	6	6,0	50,0
F1205-4	4,0	6	7,0	51,0
F1205-4,5	4,5	6	7,0	51,0
F1205-5	5,0	6	8,0	52,0
F1205-5,5	5,5	6	8,0	52,0
F1205-6	6,0	6	8,0	52,0
F1205-6,5-8	6,5	8	10,0	54,0
F1205-7-8	7,0	8	10,0	54,0
F1205-7,5-8	7,5	8	11,0	55,0
F1205-8-8	8,0	8	11,0	55,0
F1205-8,5	8,5	10	11,0	61,0
F1205-9	9,0	10	11,0	61,0
F1205-10	10,0	10	13,0	63,0
F1205-11	11,0	12	13,0	70,0
F1205-12	12,0	12	16,0	73,0
F1205-13	13,0	12	16,0	73,0
F1205-14	14,0	12	16,0	73,0
F1205-15	15,0	12	16,0	73,0
F1205-16	16,0	16	19,0	79,0
F1205-17	17,0	16	19,0	79,0
F1205-18	18,0	16	19,0	79,0
F1205-19	19,0	16	19,0	79,0
F1205-20-20	20,0	20	22,0	88,0
F1205-22	22,0	20	22,0	88,0
F1205-24	24,0	25	26,0	102,0
F1205-25	25,0	25	26,0	102,0
F1205-26	26,0	25	26,0	102,0
F1205-28	28,0	25	26,0	102,0
F1205-30	30,0	25	26,0	102,0
F1205-32-32	32,0	32	32,0	112,0
F1205-36	36,0	32	32,0	112,0
F1205-40-40	40,0	40	38,0	130,0



Malli F1305


DIN 844B HSSCO8%

- 3-leikkuinen Z3
- Poraava
- Weldon varsi
- Urajyrsintä
- Viimeistely

- Leikkumuoto
- Normi
- Nousukulma
- Leikkukulma



N
DIN 844B
30°
12°

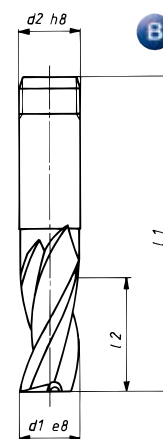

Tuotenro:	d1 mm	d2 mm	l2 mm	l1 mm
F1305-2	2,0	6	7,0	51,0
F1305-3	3,0	6	8,0	52,0
F1305-4	4,0	6	11,0	55,0
F1305-5	5,0	6	13,0	57,0
F1305-6	6,0	6	13,0	57,0
F1305-7-8	7,0	8	16,0	60,0
F1305-8-8	8,0	8	19,0	63,0
F1305-9	9,0	10	19,0	69,0
F1305-10	10,0	10	22,0	72,0
F1305-11	11,0	12	22,0	79,0
F1305-12	12,0	12	26,0	83,0
F1305-13	13,0	12	26,0	83,0
F1305-14	14,0	12	26,0	83,0
F1305-15	15,0	12	26,0	83,0
F1305-16	16,0	16	32,0	92,0
F1305-17	17,0	16	32,0	92,0
F1305-18	18,0	16	32,0	92,0
F1305-19	19,0	16	32,0	92,0
F1305-20	20,0	20	38,0	104,0
F1305-22	22,0	20	38,0	104,0
F1305-24	24,0	25	45,0	121,0
F1305-25	25,0	25	45,0	121,0
F1305-26	26,0	25	45,0	121,0
F1305-28	28,0	25	45,0	121,0
F1305-30	30,0	25	45,0	121,0
F1305-32-32	32,0	32	53,0	133,0



Malli F1345


DIN 844B HSSCO8%

- 3-leikkuinen Z3
- Poraava
- Weldon varsi



- Leikkuumuoto
- Normi
- Nousukulma
- Leikkuukulma

N
DIN 844B
30°
12°

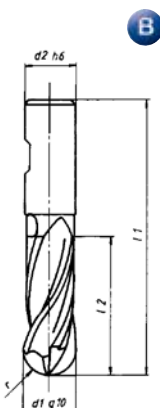

Tuoteno:	d1 mm	d2 mm	l2 mm	l1 mm	r	€ Alv 0%
F1345-2-6	2	6,0	7,0	51	1,00	37,00
F1345-3-6	3	6,0	8,0	52,0	1,50	43,00
F1345-4-6	4	6,0	11,0	55,0	2,00	38,00
F1345-5-6	5	6,0	13,0	57,0	2,50	40,00
F1345-6	6	6,0	13,0	57,0	3,00	37,00
F1345-7	7	8,0	16,0	60,0	3,50	55,00
F1345-8	8	8,0	19,0	63,0	4,00	48,00
F1345-9	9	10,0	19,0	69,0	4,50	55,00
F1345-10	10	10,0	22,0	72,0	5,00	49,00
F1345-11	11	12,0	22,0	79,0	5,50	63,00
F1345-12	12	12,0	26,0	83,0	6,00	57,00
F1345-13	13	12,0	26,0	83,0	6,50	71,00
F1345-14	14	12,0	26,0	83,0	7,00	70,00
F1345-15	15	12,0	26,0	83,0	7,50	77,00
F1345-16	16	16,0	32,0	92,0	8,00	72,00
F1345-18	18	16,0	32,0	92,0	9,00	93,00
F1345-20	20	20,0	38,0	104,0	10,00	102,00
F1345-22	22	20,0	38,0	104,0	11,00	116,00
F1345-24	24	25,0	45,0	121,0	12,00	149,00
F1345-25	25	25,0	45,0	121,0	12,50	149,00



Malli F1570


DIN 844B HSSCO5%

- Monileikkuinen Z4
- Ø 28-36 Z5
- Ø 40-50 Z6
- Pitkä malli
- Weldon varsi



- Leikkuumuoto
- Normi
- Nousukulma
- Leikkuukulma

NR
DIN 844B
27°
10°

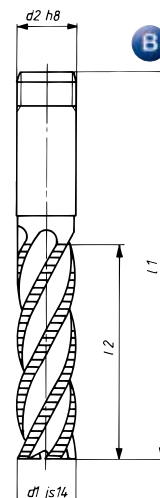

Tuoteno:	d1 mm	d2 mm	l2 mm	l1 mm	€ Alv 0%
F1570-6	6,0	6	24,0	68,0	52,00
F1570-8-8	8,0	8	38,0	82,0	55,00
F1570-8-10	8,0	10	38,0	88,0	55,00
F1570-9	9,0	10	38,0	88,0	69,00
F1570-10	10,0	10	45,0	95,0	63,00
F1570-11	11,0	12	45,0	102,0	75,00
F1570-12	12,0	12	53,0	110,0	72,00
F1570-14	14,0	12	53,0	110,0	81,00
F1570-16	16,0	16	63,0	123,0	99,00
F1570-18	18,0	16	63,0	123,0	106,00
F1570-20-20	20,0	20	75,0	141,0	131,00
F1570-22	22,0	20	75,0	141,0	153,00
F1570-25	25,0	25	90,0	166,0	189,00
F1570-28	28,0	25	90,0	166,0	217,00
F1570-30	30,0	25	90,0	166,0	265,00
F1570-32	32,0	32	106,0	186,0	275,00
F1570-36	36,0	32	106,0	186,0	362,00
F1570-40-32	40,0	32	125,0	205,0	440,00
F1570-45	45,0	40	125,0	217,0	564,00
F1570-50	50,0	50	150,0	252,0	676,00