




Malli F1405

DIN 844B HSSCO8%

- Monileikkuinen Z4
- Ø 25-32 Z5
- Weldon varsi
- Urajysintä
- Viimeistely
- Leikkuumuoto
- Normi
- Nousukulma
- Leikkuukulma



N
DIN 844B
35°
12°

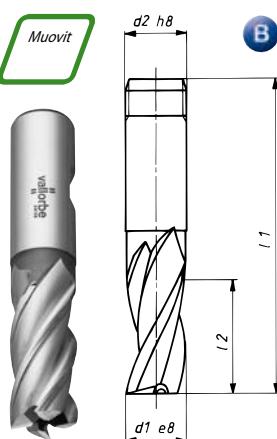

Tuotenro:	d1 mm	d2 mm	l2 mm	l1 mm
F1405-2	2,0	6	7,0	51,0
F1405-3	3,0	6	8,0	52,0
F1405-4	4,0	6	11,0	55,0
F1405-5	5,0	6	13,0	57,0
F1405-6	6,0	6	13,0	57,0
F1405-8	8,0	8	19,0	63,0
F1405-10	10,0	10	22,0	72,0
F1405-11	11,0	12	22,0	79,0
F1405-12	12,0	12	26,0	83,0
F1405-13	13,0	12	26,0	83,0
F1405-14	14,0	12	26,0	83,0
F1405-15	15,0	12	26,0	83,0
F1405-16	16,0	16	32,0	92,0
F1405-17	17,0	16	32,0	92,0
F1405-18	18,0	16	32,0	92,0
F1405-19	19,0	16	32,0	92,0
F1405-20-20	20,0	20	38,0	104,0
F1405-22-20	22,0	20	38,0	104,0
F1405-24-20	24,0	20	45,0	111,0
F1405-24-25	24,0	25	45,0	121,0
F1405-25-20	25,0	20	45,0	111,0
F1405-25-25	25,0	25	45,0	121,0
F1405-26-20	26,0	20	45,0	111,0
F1405-26-25	26,0	25	45,0	121,0
F1405-28	28,0	25	45,0	121,0
F1405-30	30,0	25	45,0	121,0
F1405-32-25	32,0	25	53,0	129,0
F1405-32-32	32,0	32	53,0	133,0




Malli F1500

DIN 844B HSSCO5%

- Monileikkuinen Z4
- Ø 25-32 Z5
- Ø 36-50 Z6
- Pitkä malli
- Weldon varsi
- Urajysintä
- Leikkuumuoto
- Normi
- Nousukulma
- Leikkuukulma



N
DIN 844B
35°
12°

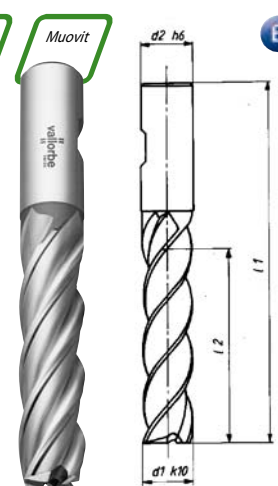

Tuotenro:	d1 mm	d2 mm	l2 mm	l1 mm
F1500-2	2,0	6	10,0	54,0
F1500-2,5	2,5	6	12,0	56,0
F1500-3	3,0	6	12,0	56,0
F1500-4	4,0	6	19,0	63,0
F1500-5	5,0	6	24,0	68,0
F1500-6	6,0	6	24,0	68,0
F1500-7	7,0	8	30,0	74,0
F1500-8	8,0	8	38,0	82,0
F1500-9	9,0	10	38,0	88,0
F1500-10	10,0	10	45,0	95,0
F1500-11	11,0	12	45,0	102,0
F1500-12	12,0	12	53,0	110,0
F1500-13	13,0	12	53,0	110,0
F1500-14	14,0	12	53,0	110,0
F1500-15	15,0	12	53,0	110,0
F1500-16	16,0	16	63,0	123,0
F1500-18	18,0	16	63,0	123,0
F1500-20	20,0	20	75,0	123,0
F1500-22	22,0	20	75,0	141,0
F1500-24	24,0	25	90,0	141,0
F1500-25	25,0	25	90,0	166,0
F1500-28	28,0	25	90,0	166,0
F1500-30	30,0	25	90,0	166,0
F1500-32	32,0	32	106,0	186,0
F1500-36	36,0	32	106,0	186,0
F1500-40	40,0	32	125,0	205,0
F1500-45	45,0	40	125,0	217,0
F1500-50	50,0	50	150,0	252,0




Malli F1530

DIN 844B HSSCO8%

- Monileikkuinen Z4
- Ø 18-25 Z5
- Erikoispitkä malli
- Weldon varsi
- Leikkuumuoto
- Normi
- Nousukulma
- Leikkuukulma



N
USINE
40°
12°

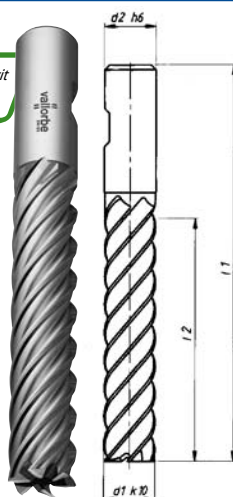

Tuotenro:	d1 mm	d2 mm	l2 mm	l1 mm
F1530-8	8,0	8	50,0	90,0
F1530-10	10,0	10	60,0	105,0
F1530-12	12,0	12	70,0	120,0
F1530-14	14,0	16	80,0	130,0
F1530-16	16,0	16	85,0	140,0
F1530-18	18,0	20	90,0	145,0
F1530-20	20,0	20	95,0	155,0
F1530-25	25,0	25	110,0	180,0



Malli F1345


DIN 844B HSSCO8%

- 3-leikkuinen Z3
- Poraava
- Weldon varsi



- Leikkumuoto
- Normi
- Nousukulma
- Leikkuukulma

N
DIN 844B
30°
12°

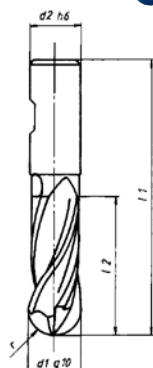

Tuotenro:	d1 mm	d2 mm	l2 mm	l1 mm	r
F1345-2-6	2	6,0	7,0	51	1,00
F1345-3-6	3	6,0	8,0	52,0	1,50
F1345-4-6	4	6,0	11,0	55,0	2,00
F1345-5-6	5	6,0	13,0	57,0	2,50
F1345-6	6	6,0	13,0	57,0	3,00
F1345-7	7	8,0	16,0	60,0	3,50
F1345-8	8	8,0	19,0	63,0	4,00
F1345-9	9	10,0	19,0	69,0	4,50
F1345-10	10	10,0	22,0	72,0	5,00
F1345-11	11	12,0	22,0	79,0	5,50
F1345-12	12	12,0	26,0	83,0	6,00
F1345-13	13	12,0	26,0	83,0	6,50
F1345-14	14	12,0	26,0	83,0	7,00
F1345-15	15	12,0	26,0	83,0	7,50
F1345-16	16	16,0	32,0	92,0	8,00
F1345-18	18	16,0	32,0	92,0	9,00
F1345-20	20	20,0	38,0	104,0	10,00
F1345-22	22	20,0	38,0	104,0	11,00
F1345-24	24	25,0	45,0	121,0	12,00
F1345-25	25	25,0	45,0	121,0	12,50



Malli F1570


DIN 844B HSSCO5%

- Monileikkuinen Z4
- Ø 28-36 Z5
- Ø 40-50 Z6
- Pitkä malli
- Weldon varsi



- Leikkumuoto
- Normi
- Nousukulma
- Leikkuukulma

NR
DIN 844B
27°
10°

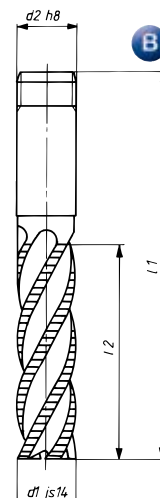

Tuotenro:	d1 mm	d2 mm	l2 mm	l1 mm
F1570-6	6,0	6	24,0	68,0
F1570-8-8	8,0	8	38,0	82,0
F1570-8-10	8,0	10	38,0	88,0
F1570-9	9,0	10	38,0	88,0
F1570-10	10,0	10	45,0	95,0
F1570-11	11,0	12	45,0	102,0
F1570-12	12,0	12	53,0	110,0
F1570-14	14,0	12	53,0	110,0
F1570-16	16,0	16	63,0	123,0
F1570-18	18,0	16	63,0	123,0
F1570-20-20	20,0	20	75,0	141,0
F1570-22	22,0	20	75,0	141,0
F1570-25	25,0	25	90,0	166,0
F1570-28	28,0	25	90,0	166,0
F1570-30	30,0	25	90,0	166,0
F1570-32	32,0	32	106,0	186,0
F1570-36	36,0	32	106,0	186,0
F1570-40-32	40,0	32	125,0	205,0
F1570-45	45,0	40	125,0	217,0
F1570-50	50,0	50	150,0	252,0