




**Malli F1405**

DIN 844B HSSCO8%

- Monileikkuinen Z4  
Ø 25-32 Z5
- Weldon varsi
- Urajysintä
- Viimeistely
- Leikkuumuoto
- Normi
- Nousukulma
- Leikkuukulma



N  
DIN 844B  
35°  
12°

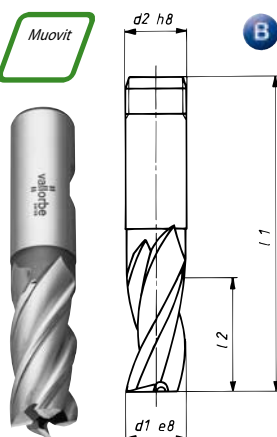

Tuotenro:	d1 mm	d2 mm	l2 mm	l1 mm	€ Alv 0%
F1405-2	2,0	6	7,0	51,0	15,40
F1405-3	3,0	6	8,0	52,0	14,00
F1405-4	4,0	6	11,0	55,0	14,00
F1405-5	5,0	6	13,0	57,0	14,00
F1405-6	6,0	6	13,0	57,0	14,20
F1405-8	8,0	8	19,0	63,0	17,00
F1405-10	10,0	10	22,0	72,0	18,30
F1405-11	11,0	12	22,0	79,0	28,40
F1405-12	12,0	12	26,0	83,0	25,40
F1405-13	13,0	12	26,0	83,0	34,50
F1405-14	14,0	12	26,0	83,0	30,90
F1405-15	15,0	12	26,0	83,0	36,50
F1405-16	16,0	16	32,0	92,0	34,50
F1405-17	17,0	16	32,0	92,0	44,00
F1405-18	18,0	16	32,0	92,0	41,80
F1405-19	19,0	16	32,0	92,0	61,00
F1405-20-20	20,0	20	38,0	104,0	49,00
F1405-22-20	22,0	20	38,0	104,0	58,80
F1405-24-20	24,0	20	45,0	111,0	74,00
F1405-24-25	24,0	25	45,0	121,0	81,60
F1405-25-20	25,0	20	45,0	111,0	82,50
F1405-25-25	25,0	25	45,0	121,0	77,50
F1405-26-20	26,0	20	45,0	111,0	103,00
F1405-26-25	26,0	25	45,0	121,0	103,00
F1405-28	28,0	25	45,0	121,0	112,00
F1405-30	30,0	25	45,0	121,0	122,00
F1405-32-25	32,0	25	53,0	129,0	133,00
F1405-32-32	32,0	32	53,0	133,0	135,00




**Malli F1500**

DIN 844B HSSCO5%

- Monileikkuinen Z4  
Ø 25-32 Z5
- Pitkä malli
- Weldon varsi
- Urajysintä
- Leikkuumuoto
- Normi
- Nousukulma
- Leikkuukulma



N  
DIN 844B  
35°  
12°

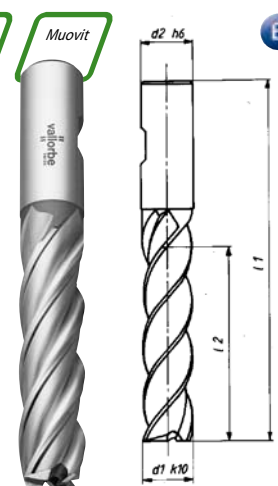

Tuotenro:	d1 mm	d2 mm	l2 mm	l1 mm	€ Alv 0%
F1500-2	2,0	6	10,0	54,0	19,00
F1500-2,5	2,5	6	12,0	56,0	19,00
F1500-3	3,0	6	12,0	56,0	18,70
F1500-4	4,0	6	19,0	63,0	18,70
F1500-5	5,0	6	24,0	68,0	18,70
F1500-6	6,0	6	24,0	68,0	20,80
F1500-7	7,0	8	30,0	74,0	29,40
F1500-8	8,0	8	38,0	82,0	23,30
F1500-9	9,0	10	38,0	88,0	33,00
F1500-10	10,0	10	45,0	95,0	28,90
F1500-11	11,0	12	45,0	102,0	40,30
F1500-12	12,0	12	53,0	110,0	35,70
F1500-13	13,0	12	53,0	110,0	49,00
F1500-14	14,0	12	53,0	110,0	49,00
F1500-15	15,0	12	53,0	110,0	56,00
F1500-16	16,0	16	63,0	123,0	55,00
F1500-18	18,0	16	63,0	123,0	65,00
F1500-20	20,0	20	75,0	123,0	75,00
F1500-22	22,0	20	75,0	141,0	99,00
F1500-24	24,0	25	90,0	141,0	145,00
F1500-25	25,0	25	90,0	166,0	131,00
F1500-28	28,0	25	90,0	166,0	160,00
F1500-30	30,0	25	90,0	166,0	166,00
F1500-32	32,0	32	106,0	186,0	175,00
F1500-36	36,0	32	106,0	186,0	232,00
F1500-40	40,0	32	125,0	205,0	276,00
F1500-45	45,0	40	125,0	217,0	400,00
F1500-50	50,0	50	150,0	252,0	516,00




**Malli F1530**

DIN 844B HSSCO8%

- Monileikkuinen Z4  
Ø 18-25 Z5
- Erikoispitkä malli
- Weldon varsi
- Leikkuumuoto
- Normi
- Nousukulma
- Leikkuukulma



N  
USINE  
40°  
12°

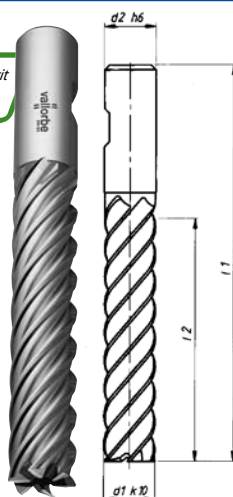

Tuotenro:	d1 mm	d2 mm	l2 mm	l1 mm	€ Alv 0%
F1530-8	8,0	8	50,0	90,0	29,00
F1530-10	10,0	10	60,0	105,0	33,00
F1530-12	12,0	12	70,0	120,0	42,00
F1530-14	14,0	16	80,0	130,0	68,00
F1530-16	16,0	16	85,0	140,0	72,00
F1530-18	18,0	20	90,0	145,0	87,00
F1530-20	20,0	20	95,0	155,0	104,00
F1530-25	25,0	25	110,0	180,0	154,00