



GRAYHILL

Product Catalog



X	Y	Y
X	Y	Y
X	Y	Y
X	Y	Y
X	Y	Y
X	Y	Y

X	Y	Y	X	Y	Y
X	Y	Y	X	Y	Y
X	Y	Y	X	Y	Y

WE MOVE PEOPLE
FORWARD WITH
ENGINEERED EASE
AND UNFAILING
PRECISION.



CONTENTS

ABOUT GRAYHILL



- 01
INTUITIVE INTERFACES
- 02
THE GRAYHILL DIFFERENCE
- 03
PROCESS CONTROL

FEATURED PRODUCTS



- 04
3J GEN 2 CONTROLLERS,
3K GEN 2 KEYPADS
- 05
3D70 CAN BUS DISPLAY,
TOUCH ENCODER

SOLUTIONS



- 06
OFF-HIGHWAY VEHICLES
- 07
MILITARY
- 08
HEALTHCARE

PRODUCTS



- 09
TOUCH ENCODER
- 10
CAN BUS DISPLAYS,
CONTROLLERS, AND KEYPADS
- 12
ROTARY SWITCHES
- 14
OPTICAL ENCODERS

PRODUCTS, CONT.



- 16
MECHANICAL ENCODERS
- 17
JOYSTICKS
- 18
HALL-EFFECT SWITCHES
- 20
KEYPADS
- 22
PUSHBUTTONS
- 24
TACT, TOGGLE, ROCKER
AND SLIDE SWITCHES
- 26
DIP SWITCHES
- 27
I/O MODULES AND RACKS



INTUITIVE INTERFACES

GRAYHILL DESIGNS AND MANUFACTURES INTUITIVE INTERFACES THAT MAKE MACHINES FEEL LIKE AN EXTENSION OF YOU.

Our integrated interfaces create a whole solution, custom-designed by our exacting engineers with finely tuned haptics specific to your needs that are experienced as a click above the rest.

Advanced components include optical encoders, rotary switches, keypads, joysticks, pushbuttons.

We move people forward with engineered ease and unfailing precision.

With Grayhill, everything clicks.

Certificates

→ AS9100D Certificates:
La Grange, McCook, Carpentersville

→ ISO9001: 2015 Certificates:
All Facilities

→ ISO14001: 2015 Certificates:
McCook, Shenzhen



THE GRAYHILL DIFFERENCE

1

ENGINEERING EXPERTISE



Our engineers understand haptics, ergonomics, styling, and the evolving needs of end users. We customize to get to the fine-tuned nuances that make a meaningful difference.

2

QUALITY IN OUR PROCESS



We integrate our own components into our intuitive interfaces, and we test and retest every step of the way to lower cost and risk.

3




VERTICAL INTEGRATION



By utilizing in-house molding, tooling, testing, and manufacturing capabilities, we bring custom products to market faster.



PROCESS CONTROL AND PRODUCTION CONSISTENCY

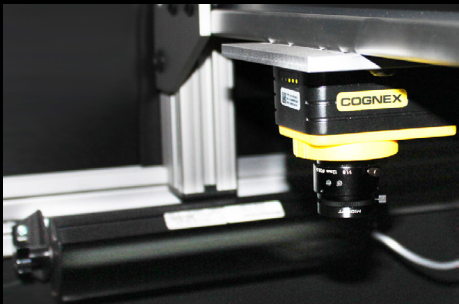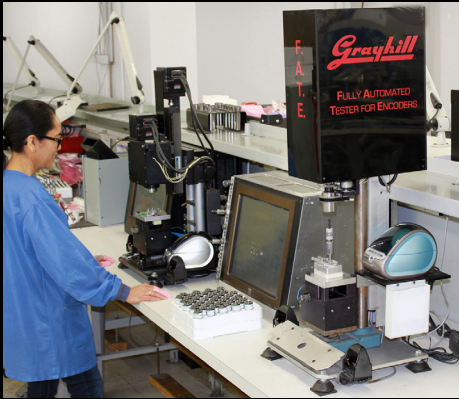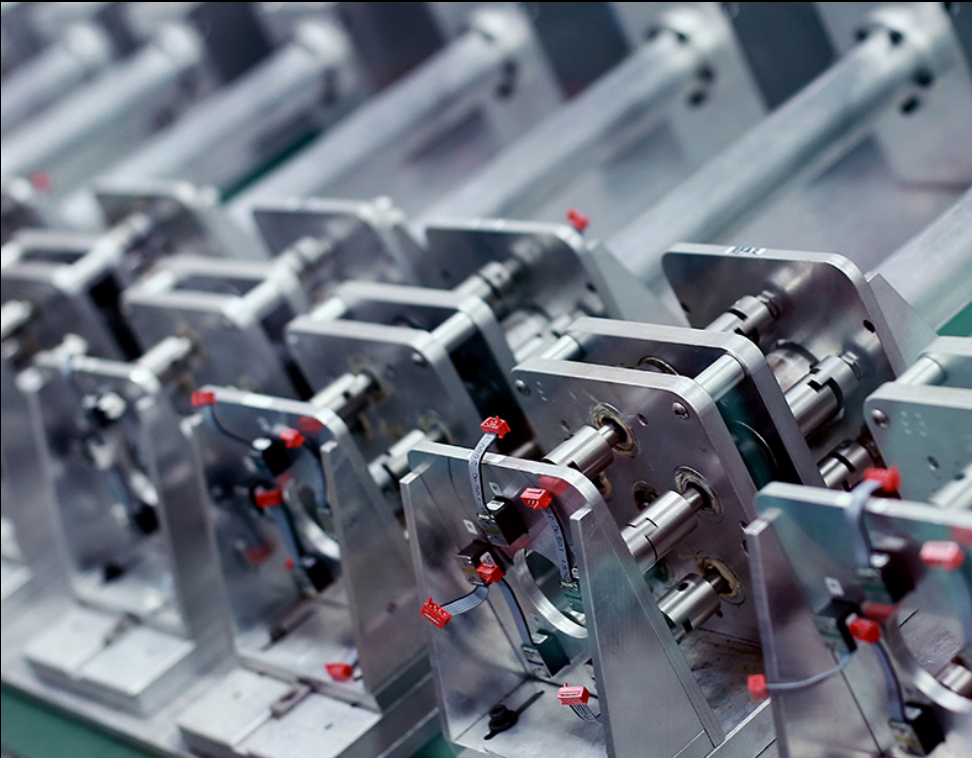

A
PRODUCT LIFE TESTERS

B
IN-PROCESS HAPTICS VALIDATION

C
END PRODUCT CALIBRATION AND VERIFICATION

D
CUSTOMIZATION EXAMPLES:
25 SERIES MULTI-DECK ROTARY SWITCHES



FEATURED PRODUCTS

SECOND GENERATION 3J CONTROLLERS

Grayhill's Generation 2 MMI Controllers are well suited for ISO 13849 Safety Rated Vehicles. They feature self-diagnostic functions, supply voltage monitoring, indicator "LED On" verification, and button malfunction detection.

These MMI Controllers require just a simple front mount and snap-in installation.



SECOND GENERATION 3K KEYPADS

Grayhill's Generation 2 CAN bus keypads offer a low-profile snap-in mounting scheme, wide viewing angle LED indicators, built-in diagnostics capabilities, and 2 I/O pins (except for 6 button variants).

The legends on this keypad will exceed the stringent Off-Highway requirements for Abrasion, UV, and Chemical Resistance.

Available in various form factors (6, 8, 12, and 15 button) supporting both the J1939 and CANopen protocols. These IP 67 sealed keypads can have customized artwork and LED backlight/indicator colors).



FEATURED PRODUCTS

3D70 CAN BUS DISPLAY

The 7-inch versatile display utilizes a scratch resistant, anti-glare window that optically bonds to the LCD to ensure visibility under strong sunlight.

The flush-mounted displays can blend with any vehicle cab seamlessly and provide a modern look and feel to your design.

The display supports Qt by default and offers an additional CODESYS application development option.



TOUCH ENCODER

Our newest Touch Encoder combines the functionality of conventional touch displays, keypads, and rotary switches that can support multiple languages and end-product configurations.

The Grayhill Software team developed an intuitive app allowing the user to easily create projects.



SOLUTIONS

OFF-HIGHWAY VEHICLES

Grayhill understands the human interface requirements of farmers and construction workers. Because operators of off-highway vehicles spend long days in the driver's seat, engineers at Grayhill look beyond basic functionality to improve operator efficiency and comfort.

We specialize in creating user interface devices that communicate via CAN bus (J1939 and CANopen protocol) to control on-board systems. A standard range of keypads, joystick/encoders and displays are offered as base products ready for quick, cost-effective customization.

These products simplify mechanical installation into the vehicle cab and electrical integration with the vehicle's control units. Grayhill can also deliver intuitive user interfaces for your vehicle application.



A



B



C

A
CUSTOM KEYPAD AND JOYSTICK CONTROLLER

B
CUSTOM CONTROLS CONSOLE

C
CUSTOM ARMREST



MILITARY

Grayhill delivers custom human interface solutions that meet the needs of our military personnel in the field.

Grayhill can customize our extensive offering of rotary switches and encoders by changing form factor, electrical termination or adding shaft/panel seals to providing custom populated flex sub-assemblies that our customers can install in their final assemblies.

Grayhill also provides custom military HMI solutions that can contain Keypads, Wide Temperature Displays, Electronics with custom firmware that can contain MIL-STD-3009 compliant NVIS lighting. Having been a military component supplier for more than 75 years, Grayhill has the expertise to deliver products that reliably meet the rugged military environmental requirements while providing the high quality haptics expected by soldiers when using our products. Grayhill is AS9100 Rev D and ITAR Compliant.



A



B



C



D

A
HANDHELD RADIO KEYPAD

B
CUSTOM RADIO HMI AND ROTARY SWITCHES

C, D
RUGGED, LOW PROFILE ROTARY SWITCH



SOLUTIONS

HEALTHCARE

Grayhill always focuses on creating a reliable user interface solution for the end user, no matter the application.

In the case of medical professionals, our products aim to provide excellent tactile and audible feedback during critical situations.

We design with minimal crevices and durable materials to meet cleaning and disinfection requirements commonly seen in healthcare applications.



A



B



C

A
CT SCANNER INTERFACE

B
PATIENT BED CONTROLS

C
ULTRASOUND CONTROL PANEL



TOUCH ENCODER

Key Features

Replaces many traditional user input devices (such as switches, keypads, pushbuttons, displays, etc.) with a simple and intuitive device.

Supported Gestures

- Tap + Swipe + Turn

High Resolution Display

- 245 PPI (320 × 300)

Quick User Interface Development

- Intuitive development platform
- Library of configurable standard widgets

Incorporates Pictures

- PNG, JPEG, etc.

Robust



- Sealed to IP67, high impact strength, chemical resistant
- Optimal front panel footprint
- Stores hundreds of screens (32MB memory)
- Field upgradable application and firmware
- 1,000,000 encoder cycles
- USB 2.0 or CAN J1939 communications with host device

Touchscreen/Display

- Optically bonded display and touchscreen for excellent sunlight readability
- Touchscreen construction: High Resolution PCAP ITO

Touch Encoder App

Create countless widget configurations by using the Touch Encoder app.

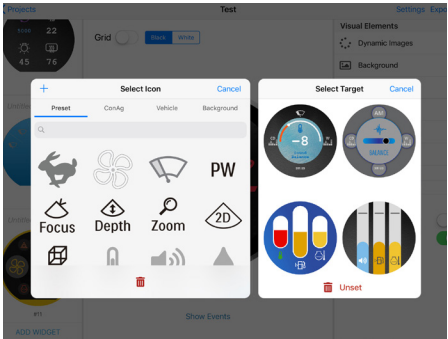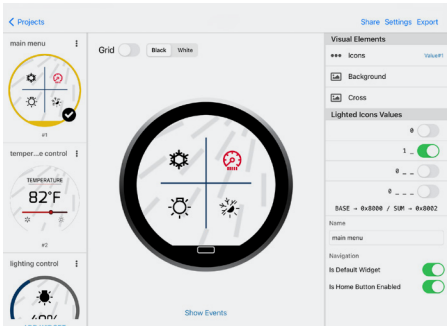





Diameter	Position	Output	Connector	Knob Style
2.22 in [56.4 mm]	32 Positions, 11.5° Angle of Throw	– USB 2.0 – CAN J1939	– M12 – PCB	– Diamond Knurl, 304 SS – Brushed Finish, 304 SS – Diamond Knurl, Black Chrome, 304 SS – Brushed Finish, Black Chrome, 304 SS – Rubber Overmolded



CAN BUS DISPLAYS, CONTROLLERS, AND KEYPADS



3D2104 SERIES DISPLAY	Description	Configurations	Features
	10.4-inch XGA Display	Optional touchscreen	<ul style="list-style-type: none">– J1939 compliant CAN interface– 7 soft keys– IP67 sealed– Four video inputs– 800 MHZ i.MX6 Dual Core Processor– Excellent sunlight readability– 600-nit backlight intensity
3D101 SERIES DISPLAY	Description	Configurations	Features
	10.1-inch WXGA Display	Optional touchscreen	<ul style="list-style-type: none">– J1939 compliant CAN interface– Wide viewing angle– IP67 sealed– Four video inputs– 800 MHZ i.MX6 Dual Core Processor– Excellent sunlight readability– 1000-nit backlight intensity– Landscape or portrait mode
3D70 SERIES DISPLAY	Description	Configurations	Features
	7-inch WVGA Display	Optional touchscreen	<ul style="list-style-type: none">– Flush panel-mount module can be built into dashboards and armrest assemblies– Responsive touchscreen works with bare or gloved fingers even in wet/dirty environments– Optically bonded display for excellent sunlight readability– J1939, CANopen, CoDeSys, or QT interface– Bright, 1000-nit display– Landscape or portrait mode
3D50 SERIES DISPLAY	Description	Configurations	Features
	5-inch WVGA Display	Optional touchscreen	<ul style="list-style-type: none">– Flush panel-mount module can be built into dashboards and armrest assemblies– Responsive touchscreen works with bare or gloved fingers even in wet/dirty environments– Optically bonded display for excellent sunlight readability– J1939, CANopen, CoDeSys, or QT interface– Bright, 700-nit display– Landscape or portrait mode



CAN BUS DISPLAYS, CONTROLLERS, AND KEYPADS

3D35 SERIES DISPLAY



Description	Configurations	Features
3.5-inch HVGA Display	<ul style="list-style-type: none"> – Customizable backlight color – Customizable key icons 	<ul style="list-style-type: none"> – Bright, 1000-nit display – Optically bonded display – 18 bit color, wide viewing – 4 soft backlit keys – 550 MHz processor – 32MB Flash, 16MB RAM

3D32 SERIES DISPLAY



Description	Configurations	Features
3.2-inch Transfective Monochrome LCD	CAN bus, I/O, Heater	<ul style="list-style-type: none"> – Easily display custom graphic icons, text boxes and active gauge elements – Controlled via J1939 PGNs – Rated for off-highway vehicles – Extended operating temperature range: -50° C to +85°C (with heater) – Protected against the ingress of liquids and dust: IP67 rated seal – Anti-glare display

3J GEN 2 SERIES



Description	Configurations	Features
Newest MMI Controller	3 options for center knob: <ul style="list-style-type: none"> – Optical Rotary Encoder – Encoder with Pushbutton – Proportional Joystick with optional Pushbutton 	<ul style="list-style-type: none"> – Modern flush styling – No-tool snap-in front mounting – Designed for ISO 13849 safety rated vehicles – Self-diagnostics included – Low current sleep mode – Custom legends and configurations

3K GEN 2 SERIES



Description	Configurations	Features
Newest CAN Bus Keypads	5 standard sizes (R x C): <ul style="list-style-type: none"> – 15 keys (3 x 5) – 12 keys (4 x 3) – 8 keys (4 x 2) – 8 keys (2 x 4) – 6 keys (2 x 3) 	<ul style="list-style-type: none"> – Modern flush styling – No-tool snap-in front mounting – Designed for ISO 13849 safety rated vehicles – Self-diagnostics included – Low current sleep mode – Custom legends and configurations – 2 configurable I/O pins

3J SERIES



Description	Configurations	Features
Legacy Vehicle Display Controller	3 options for center knob: <ul style="list-style-type: none"> – Optical Rotary Encoder – Encoder with Pushbutton – Joysticking Encoder with Pushbutton 	<ul style="list-style-type: none"> – 500,000 encoder cycles – 1,000,000 cycles per key – J1939 and CANopen versions – Sealed to IP67 for outdoor use – Vibration and impact resistant – Operating temp: -40°C to +85°C – Designed for 12/24 volt systems – Custom legends and configurations

3K SERIES



Description	Configurations	Features
Legacy CAN Bus Keypads	6 standard sizes (R x C): <ul style="list-style-type: none"> – 20 keys (4 x 5) – 15 keys (3 x 5) – 12 keys (4 x 3) – 8 keys (4 x 2) – 8 keys (2 x 4) – 6 keys (2 x 3) 	<ul style="list-style-type: none"> – 1,000,000 cycles per key – J1939 and CANopen versions – Sealed to IP67 for outdoor use – Vibration and impact resistant – Operating temp: -40°C to +85°C – Designed for 12/24 volt systems – Custom legends and configurations – 0-3 indicator LEDs per key



ROTARY SWITCHES

GRAYHILL IS THE LEADING MANUFACTURER OF SINGLE AND MULTI-DECK ROTARY SWITCHES WITH EXTREMELY RUGGED CONSTRUCTION AND VIRTUALLY LIMITLESS CONFIGURATIONS.

Many of our rotary switches are MIL qualified to exacting electrical, mechanical and environmental standards. We offer many options including isolated positions, spring returns, adjustable stops, concentric shaft switches and configurable keylock switches.

→ Contact a Grayhill representative early in your design process to discuss your application. In many cases, we can meet your requirements with a standard option or a simple modification.

PRODUCT SELECTION CHART: SINGLE DECK

Series	Features	Life Cycles	Poles	Angles of Throw (°)	Rating (Max)	Switch Diameter inches [mm]	Behind Panel Depth inches [mm]	Termination Options
19	UL Recognized, High Current	6,000	1	30	15A	2.000 [50,80]	0.950 [24,13]	Solder Lug, Faston
24	Long Operational Life at 1 Amp	100,000	1	36	1A	1.000 [25,40]	0.20 [5.08] to 1.015 [25.78]	PC Mount, Solder Lug
50	MIL-Qual Available Process Seal Available	25,000	1-2	36, 45, 60, 90	200mA	0.500 [12,70]	0.698 [17,72]	PC Mount, Solder Lug
51	Same as Above, Up to 16 Positions	25,000	1-4	22.5, 30	200mA	0.562 [14,27]	0.698 [17,72]	PC Mount, Solder Lug
56	Compact Format	25,000	1, 2, 4	30, 36	200mA	0.500 [12,70]	0.355 [9,02]	PC Mount, Solder Lug
75	Minimal Diameter, Flush or Knob Shaft	10,000	1-2	36	200mA	0.300 [7,62]	0.550 [13,97]	PC Mount
77	Minimal Depth Behind Panel	25,000 Max (Non-shorting)	1-2	36	200mA	0.500 [12,70]	0.180 [4,57]	PC Mount

Typical applications include:

- Two-way radio frequency selection
- Industrial controls, test and measurement tools
- Security systems with keylock controls
- Military radios, transmitters and receivers
- Ground and airborne vehicle controls

Customizations can include:

- Fixed stop, adjustable stop or continuous rotation
- Multiple termination and cabling options
- Custom detents (clicks) and tactile feel
- Special operations such as pull-to-turn
- Modified shaft lengths and flats



KEYLOCKS

Series	Features	Life Cycles	Decks	Poles	Angles of Throw (°)	Rating (Max)	Switch Diameter inches [mm]	Behind Panel Depth inches [mm]	Termination Options
44L	8-Pin Round Key	25,000	1-6	1-4	45	5A	1.170 [29,72]	1.556 [29,52] to 3.536 [89,81]	Solder Lug
58	In-Panel Key Recoding	25,000	1	1-2	36, 45, 60, 90	200mA	0.900 [22,86]	1.857 [47,17] to 1.957 [49,71]	PC Mount, Solder Lug
71J,L	5-Plates, 1-Sided Key	25,000	1-12	1-6	30, 36	250mA	0.900 [22,86]	1.339 [34,01] to 4.247 [107,87]	Solder Lug

PRODUCT SELECTION CHART: MULTI-DECK

Series	Features	Life Cycles	Decks	Poles per Deck	Angles of Throw (°)	Rating (Max)	Switch Diameter inches [mm]	Behind Panel Depth inches [mm]	Termination Options
08	MIL-S-3786/13	25,000	1-12	1-2	36	250mA	0.687 [17,45]	1.228 [31,19] to 4.158 [105,61]	PC Mount, Solder Lug
09	MIL-S-3786/13	25,000	1-12	1-6	30, 45, 60, 90	250mA	0.750 [19,05]	1.228 [31,19] to 4.158 [105,61]	PC Mount, Solder Lug
42, 44	MIL-S-3786/4, SR04-1	100,000	1-12	1-6	30, 36, 45, 60, 90	1A	1.000 [25,40] to 1.162 [29,51]	1.025 [26,04] to 5.081 [129,06]	PC Mount, Solder Lug
43, 54	MIL-S-3786/4, SR04-2	100,000 Max	1-3	1-2	30, 36	1A	1.000 [25,40] to 1.162 [29,51]	0.974 [24,74] to 3.451 [87,66]	Solder Lug
53 57 59	Smallest Switch with this many positions	25,000	1-12	1-9 1-8 1-9	15 22.5 18	250mA 250mA 250mA	1.281 [32,54] 1.125 [28,58] 1.125 [28,58]	0.916 [23,27] to 4.829 [122,66]	Solder Lug Solder Lug Solder Lug
71	MIL-S-3786/39	25,000	1-12	1-6	30, 36	250mA	0.500 [12,70] to 0.750 [19,05]	0.761 [19,33] to 4.274 [108,56]	PC Mount, Solder Lug



OPTICAL ENCODERS

GRAYHILL SPECIALIZES IN OPTICAL ENCODERS THAT PROVIDE EXCELLENT TACTILE FEEDBACK TO THE USER.

The greatest advantage of optical encoders is their non-contact switching technology which results in an exceptionally high operational life. Although the end-product may vary, typical applications measure speed, distance and/or rotational angle.



61A

61K/R, 63K/R

62A/62AG

62B


62C

62F

62HR

Typical applications include:

- Medical electronics, including patient monitors, ventilators and imagers
- Communication systems, including two-way radios and software defined radios
- Navigation devices for ground vehicles and avionic systems
- Precision test and measuring equipment
- Sound mixing and editing consoles
- Automotive climate control and entertainment systems

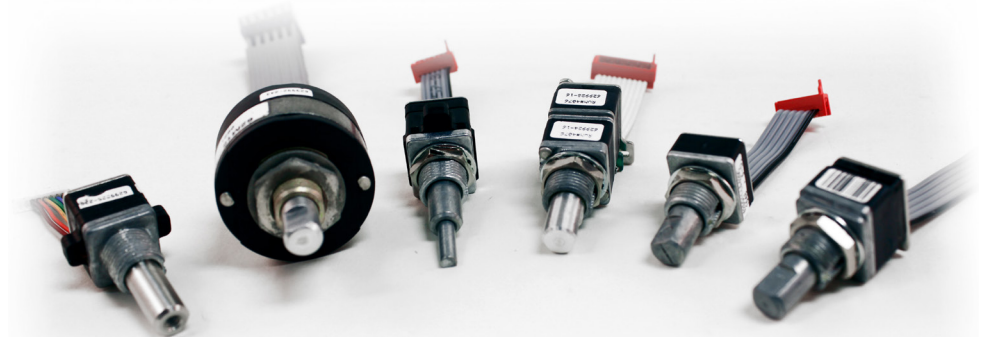

62HS

62M

62N

62R

62S

62V

Customizations can include:

- Custom detents (clicks) and tactile feel
- Modified shaft lengths and flats
- Multiple termination and cabling options
- Custom electronics for unique outputs
- Special packaging such as custom mounts



62AG/62VG

62SG

62NG

62T



PRODUCT SELECTION CHART

Series	Features	Life Ratings (cycles)	Resolution	Body Size inches [mm]	Behind Panel Depth inches [mm]	Integrated Pushbutton
61A	Absolute Coding	1,000,000	8, 16, 24, 32 PPR	0.875 [22,22] sq.	0.525 [13,33]	No
61K	4-Pin Termination, High Resolution	10,000,000	25, 32, 50, 64, 100, 128, 256 CPR	1.250 [31,75] dia.	0.500 [12,70]	No
61R	5-Pin Termination, Polarized Connection	10,000,000	25, 32, 50, 64, 100, 128, 256 CPR	1.250 [31,75] dia.	0.500 [12,70]	No
62A	Small Package	1,000,000	12 16, 20, 24, 32 PPR	0.500 × 0.540 [12,70 × 13,72]	0.525 [13,34]	Yes, optional
62AG	Price Competitive 62A	1,000,000	16, 20, 24, 32 PPR	0.500 × 0.580 [12,70 × 14,73]	0.532 [13,51]	Yes, optional
62B	Push & Pull to Select	1,000,000	16, 32 PPR	0.687 [17,45] dia.	1.080 [27,43]	Yes, push and pull
62C	Concentric Shaft	1,000,000	12, 16, 20, 24, 32 PPR	0.500 × 0.580 [12,70 × 14,73]	0.933 [23,69]	Yes, optional
62D	High Torque (3.5in-oz)	1,000,000	12 16, 20, 24, 32 PPR	0.500 × 0.580 [12,70 × 14,73]	0.525 [13,34]	Yes, optional
62F	Knob Illumination	1,000,000	16, 20, 24, 32 PPR	0.500 × 0.540 [12,70 × 13,72]	0.657 [16,68]	Yes, optional
62H	High Torque, Concentric Shaft	1,000,000	8, 12, 16 PPR	0.740 × 0.750 [18,80 × 19,05]	0.878 [22,30]	Yes, optional
62HN	High Torque Non-Turn Concentric Shaft	1,000,000	8, 12, 16 PPR	0.740 × 0.750 [18,80 × 19,05]	0.785 [19,94]	Yes, optional
62HR	High Torque, Redundant Output	1,000,000	8, 12 16 PPR	0.740 × 0.750 [18,80 × 19,05]	0.845 [21,46]	Yes, optional
62HS	High Torque, Minimal Behind Panel	1,000,000	8, 12, 16 PPR	0.650 × 0.750 [16,50 × 19,05]	0.530 [13,46]	Yes, optional
62M	Magnetic Detent	3,000,000	24 PPR	1.100 [27,94] dia.	0.725 [18,42]	Yes, optional
62N	Low Torque Non-Turn Concentric Shaft	1,000,000	12, 16, 24, 32 PPR	0.500 × 0.540 [12,70 × 13,72]	0.670 [17,02]	Yes
62NG	Price Competitive 62N	1,000,000	16, 20, 24 PPR	0.580 × 0.550 [14,73 × 12,70]	0.532 [13,51]	Yes
62R	Redundant Output	1,000,000	12, 16, 24 PPR	0.500 × 0.540 [12,70 × 13,72]	0.933 [23,69]	Yes, optional
62S	Minimal Depth Behind Panel	1,000,000	8, 12, 16, 20, 24, 32 PPR	0.500 × 0.540 [12,70 × 13,72]	0.290 [7,37]	Yes, optional
62SG	Price Competitive 62S	1,000,000	16, 24, 32 PPR	0.500 × 0.580 [12,70 × 14,73]	0.292 [7,42]	Yes, optional
62SR	Sealed Encoder and Cable Assembly	1,000,000	12, 16, 20, 24 PPR	1.000 × 0.870 [25,40 × 22,10]	0.550 [13,97]	Yes, optional
62T	Thumbwheel	1,000,000	16 PPR	0.780 × 1.758 [19,81 × 44,65]	0.650 [16,51]	Yes, optional
62V	3.3Vdc Input	1,000,000	12 16, 20, 24, 32 PPR	0.500 × 0.540 [12,70 × 13,72]	0.525 [13,34]	Yes, optional
62VG	3.3Vdc Input	1,000,000	16, 20, 24, 32 PPR	0.500 × 0.540 [12,70 × 13,72]	0.532 [13,51]	Yes, optional

CPR: Quadrature Cycles per Revolution
PPR: Pulse per Revolution



MECHANICAL ENCODERS

GRAYHILL MECHANICAL ENCODERS COMBINE THE FEEL OF OUR ROTARY SWITCHES WITH A DIGITAL OUTPUT.

They provide an economical way of obtaining Octal, Binary Coded Decimal, Hexadecimal and Gray code output from a rotary switch. Standard products include offerings with concentric shafts, isolated positions and adjustable stops.

PRODUCT SELECTION CHART

Series	Features	Life Ratings (Cycles)	Angles of Throw (Degrees)	Output Code	Body Size inches [mm]	Behind Panel Depth inches [mm]
20	Concentric Shafts	25,000	22, 30, 36, 45	Binary, Gray, Quadrature	0.500 [12,70] sq.	0.659 [16,74]
25	Multi-Deck	50,000	10, 11.25, 12, 15, 18, 22.5, 30, 45, 60, 90	Binary, Gray, Quadrature	0.865 [21,97] sq.	0.450 to 1.050 [11,43 to 26,67]
25L	Price Competitive	100,000	10, 11.25, 15, 18, 22.5, 30, 45	Hexadecimal, Gray, Quadrature	0.865, [21,97] sq.	0.343 [8,71]
26	Small Size	25,000	22.5, 45	Quad, Octal, BCD, Hex, Gray	0.500 [12,70] dia.	0.332 [8,43]
26 PTT	Pull-to-turn (isolated positions)	25,000	22.5	Binary, Gray	0.500 [12,70] dia.	0.600 [15,24]
51	PC Mount, Adjustable Stops	25,000	30	Binary or Binary Complement	0.562 [14,27] dia.	0.537 [13,64]
71	Solder Lugs	25,000	36	Binary	0.687 [17,45] dia.	0.761 [19,33]

Typical applications include:

- Automotive GPS and radios
- Medical equipment
- Audio/visual recording/mixing equipment
- Avionics
- Transportation equipment
- Fitness equipment
- Test and measurement equipment
- Agricultural equipment
- Construction equipment
- Oscilloscopes
- Pulse/signal generators

Customization can include:

- Custom detents (clicks) and tactile feel
- Output codes
- Modified shaft lengths and flats
- Multiple termination and cabling options
- Integration into a custom front panel assembly



JOYSTICKS

NAVCODERS™ ARE A UNIQUE INTERFACE DEVICE FOR NAVIGATING THROUGH ON-SCREEN SOFTWARE.

- 4-way or 8-way directional control to navigate through menu options
- Center pushbutton for selecting menu options
- Rotational control for scrolling through many options or adjusting an intensity setting such as volume

JOYSTICK ENCODERS

Series	Features	Life Rating (cycles)	Resolution	Body Size inches [mm]	Behind Panel Depth inches [mm]
60A	2, 4 or 8 Direction Joystick, Rotary Encoder and Pushbutton on Single Shaft	Joystick: 500,000 Rotary: 1,000,000 Push: 1,000,000	20 PPR	1.000 [25,40] dia.	0.598 [15,19]
60AD	Same as 60A plus three levels of joystick/pushbutton force and rotary torque	Joystick: 500,000 Rotary: 1,000,000 Push: 1,000,000	20 PPR	1.000 [25,40] dia.	0.950 [24,13]
60AR	Rugged, 4 or 8 Direction Joystick, Rotary Encoder and Pushbutton, Sealed to IP67	Joystick: 500,000 Rotary: 1,000,000 Push: 1,000,000	20 PPR	1.000 [25,40] dia.	0.950 [24,13]
60C	4 Direction Joystick plus Rotary Encoder and Pushbutton on Concentric Shafts	Joystick: 500,000 Rotary: 500,000 Push: 500,000	16 PPR	1.000 [25,400] sq.	0.661 [16,79]

DISCRETE JOYSTICKS

Series	Features	Life Rating (cycles)	Electrical Characteristics	Circuitry	Termination	Behind Panel Depth inches [mm]
04J	Rugged & Sealed, Four Directions with Center Pushbutton	100,000	2A resistive at 115 VAC	5PST: NO	Solder Lug PC Mount	0.659 [16,73]
04JT	Great Tactile Feedback Dynamically Sealed when properly mounted	250,000	0.5mA resistive at 5VDC	4PST: NO	Solder Lug PC Mount	0.689 [17,50]



HALL-EFFECT SWITCHES

HALL-EFFECT TECHNOLOGY PROVIDES CONTACTLESS OPERATION, FACILITATING A LONG OPERATIONAL LIFE.


The Hall-effect sensor magnetically detects the position of another moving part such as the shaft in a joystick or encoder. This relational position can be output from the device in a variety of formats, including I2C, open collector or push-pull output. Hall-effect technology has the advantage of working in low voltage applications and often features a sleep mode to conserve power. Grayhill is introducing this technology across several switch types, including joysticks, paddle/rockers and rotaries.

Typical applications include:

- Off-Highway vehicles
- Material handling equipment
- Medical electronics, including bed and table positioning
- Remote control Belly Box
- Robotic and industrial automation controllers
- Marine GPS and controls
- Security camera positioning

Customizations can include:

- Various housing and mounting options
- Multiple termination and cabling options
- Custom electronics and output
- Redundancy

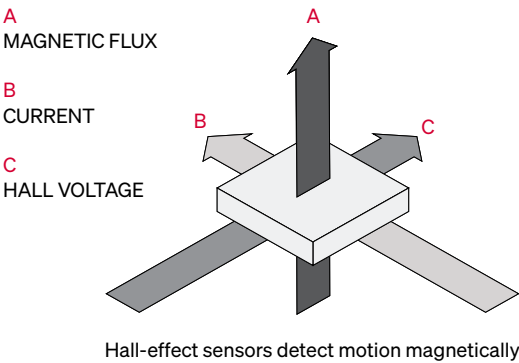

JOYSTICKS

These compact joysticks can provide precise cursor control where other pointing devices are impractical, such as on test and measurement equipment or medical electronics. Other applications include CNC positioning, industrial/robotic control and work vehicles/aerial platforms.

Series	Features	Life Rating (cycles)	Range of Movement	Body Size inches [mm]	Behind Panel Depth inches [mm]	Output
67A	Joystick Small Package	1,000,000 Joystick	Shaft travel 20° in any direction	1.300 [33,02] sq	0.727 [18, 47]	I ² C Proportional
67B	Joystick with Momentary Rotation & Pushbutton	1,000,000 Rotary, 1,000,000 Pushbutton, 1,000,000 Joystick	Shaft travel 20° in any direction	1.250 [31,75] dia	.629 [15,98]	I ² C Proportional joystick I ² C Rotation Mechanical pushbutton
67C	Joystick with 360° Rotation & Pushbutton	1,000,000 Rotary, 1,000,000 Pushbutton, 2,000,000 Joystick	4 sensors, 8 directions	1.000 ± .015 dia	.588 ± .015	Proportional joystick Quadrature Encoder Mechanical pushbutton



HALL-EFFECT SWITCHES

ROTARY

These rotary switches share the same sensor technology: Hall-effect. But their outputs differ substantially. The 68A provides digital quadrature output, similar to other Grayhill encoders. The 68P provides a proportional analog output, similar to a potentiometer. Both benefit from non-contact Hall-effect technology.

Series	Features	Life Rating (cycles)	Resolution	Body Size inches [mm]	Behind Panel Depth inches [mm]	Output
68A	Rotary, Optional Redundancy	1,000,000 for rotary & pushbutton	16 PPR	.500 [12, 7] sq	.562 ± .015 [14,26 ± 0,38]	Quadrature rotary mechanical pushbutton
68P	Rotary, Optional Redundancy	7,000,000 for rotary	0.5V - 4.5V every 360°	.500 [12, 7] sq	.503 ± .015 [12,78 ± 0,38]	Proportional



PADDLE/ROCKER

Series	Features	Life Rating (cycles)	Range of Movement	Body Size inches [mm]	Behind Panel Depth inches [mm]	Output
68B	Paddle Switch, Friction Hold, Latching, and Return to Center Option	200,000 Friction Hold, 200,000 Latching, 2,000,000 Return to Center	Paddle travel 40° both ways Latching angle 36° Detent angle 26°	1.062	.273 ± .005	Proportional PWM



68B FEATURED WITH RED, YELLOW, GREEN, BLUE, PURPLE AND BLACK OUTLINE COLORS



KEYPADS

GRAYHILL OFFERS A FULL LINE OF CUSTOMIZABLE KEYPADS. STANDARD CONFIGURATIONS INCLUDE SEALED RUBBER KEYPADS, VANDAL-RESISTANT METALLIC CONSTRUCTION, AND LOW-PROFILE OR FULL TRAVEL ACTUATION KEYPADS.

Switching technologies include conductive rubber and metal dome contacts. Outputs include matrix output and single pole/common bus. All keypads have options for custom legends and many feature backlit keys. Often, a keypad technology is specified for integration into a custom front panel assembly. In these cases, the keypad technology can be deployed in a custom shape to meet the unique requirements of the application.




Typical applications include:

- Transportation equipment
- Healthcare equipment
- Fitness equipment
- Avionics
- ATMs and kiosks
- Security systems
- Industrial controls

Customization can include:

- Legends
- Bezel color
- Multiple termination & cabling options
- Custom electronics
- Membrane, dome, or carbon pill switching
- Construction: plastic, silicone rubber, metal, etc.








PRODUCT SELECTION CHART

Series	Features	Life Rating (cycles per key)	Array	Standard Output	Sealed	Backlit
82	 Lightable Modules that Stack in any Configuration, Insertable Legend Sheets	1,000,000	Single Button, 1×2, 1×3, 2×3	SPST, 2PST, 3PST, 4PST	N	Y
83	 Excellent Tactile Feedback from Snap-Dome Contacts, 0.5" [12,7mm] Centers	3,000,000	3×4, 4×4	Matrix or Common Bus	N	N
84	 Excellent Tactile Feedback from Snap-Dome Contacts, 0.75" [19,05mm] Centers	3,000,000	3×4, 4×4	Matrix or Common Bus	N	N



KEYPADS

PRODUCT SELECTION CHART, CON'T.

Series	Features	Life Rating (cycles per key)	Array	Standard Output	Sealed	Backlit
84BL	 Backlit, Sealed, Permanent Legends	3,000,000	3×4, 4×4	Matrix	Y	Y
84S	 Sealed Silicone Rubber, Snap Dome Contacts	3,000,000	Single Button, 3×4, 4×4	Matrix or Common Bus	Y	N
84LS	 Sealed Construction, Snap Dome Contacts	3,000,000	Single Button, 3×4, 4×4	Matrix or Common Bus	Y	N
86	 Flange Mounted, 0.5" [12,7mm] Centers	3,000,000	3×4, 4×4, 5×4	Matrix or Common Bus	N	N
87	 Modules Stack in any Configuration	3,000,000	1, 2, 3, 4, 5, 6, 3×4, 4×4	Matrix or Common Bus	N	N
88	 Flange Mounted, Splash Resistant, Low Profile Domes	3,000,000	3×4, 4×4, 5×4	Matrix or Common Bus	N	N
96	 Conductive Rubber Contacts	1,000,000	3×4, 4×4	Matrix	N	Y



PUSHBUTTONS

GRAYHILL'S PUSHBUTTON SWITCHES HAVE BEEN PROVEN AS A RUGGED SOLUTION FOR COUNTLESS APPLICATIONS.

Our pushbuttons employ a variety of contact mechanisms, circuitry, mounting and termination options. With such a wide variety available, it's easy to find one that meets your requirements. If you require customization, we can offer custom actuation force and travel distance, or custom termination and cabling options.

SNAP ACTION

Series	Features	Life Rating (cycles)	Electrical Rating	Circuitry	Termination	Behind Panel Depth inches [mm]
7/2000	Audible Click, Fast Make-and-Break	25,000	10 Amps at 115 Vac	SPST: NO & NC SPDT: BBM	Faston, Solder Lug	0.796 [20,22]

WIPING CONTACT SWITCHES


Series	Features	Life Rating (cycles)	Electrical Rating	Circuitry	Termination	Behind Panel Depth inches [mm]
10/4000	Momentary Contact, UL-3A Version Available	Up to 100,000	1 Amp at 115 Vac for long life version	SPST: NO & NC	Solder Lug	0.688 [16,97]
23	Momentary Contact, Short travel: 2,41mm	100,000	250mA at 115 Vac	SPST	Solder Lug	0.476 [12,09]
46	High Reliability, Available Sealed	Up to 250,000	250mA at 115 Vac	SPDT: BBM & MBB DPDT: BBM & MBB	Solder Lug or Sealed Wires	0.770 to 1.140 [19,56 to 29,00]
30/46	Decorator Line with Attractive Front Bezel	250,000	250mA at 115 Vac	SPDT: BBM & MBB DPDT: BBM & MBB	Solder Lug	0.992 to 1.448 [25,20 to 36,78]

Typical applications include:

- Security systems
- Industrial manufacturing equipment
- Casino gaming
- Audio/video equipment
- Avionics
- Fitness equipment
- Test and measurement equipment

Customizations can include:

- Custom caps and legends
- Custom detents (clicks) and tactile feel
- Multiple termination and cabling options
- Custom electronics
- Integration into a Grayhill custom front panel assembly

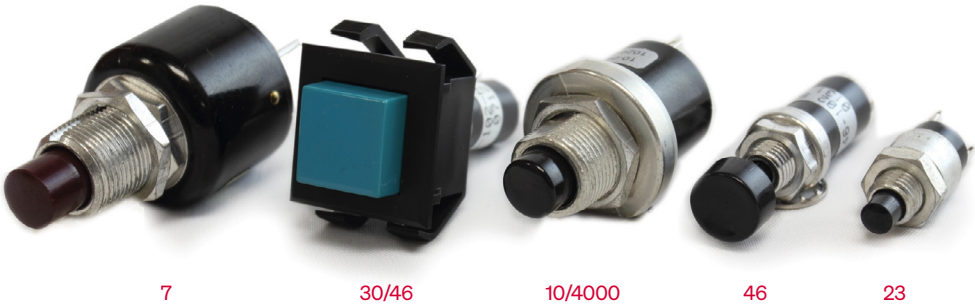


PUSHBUTTONS

SMT KEY SWITCHES

Series	Features	Life Rating (cycles)	Electrical Rating	Circuitry	Termination	LED Colors
14	Sealed & Illuminated	1,000,000 Max	1 mA at 30 VDC	SPST, DPST	SMT	Red Orange Yellow/Amber Green Blue White

BUTT CONTACT SWITCHES

Series	Features	Life Rating (cycles)	Electrical Rating	Circuitry	Termination	Behind Panel Depth inches [mm]
30	Reliable Panel Mount, UL-5A Version Available	Up to 1,000,000	1 Amp at 115 Vac for long life version	SPST: NO & NC	Solder Lug	0.315 to 0.455 [8,00 to 11,56]
30-100	Snap-in Panel Mount	500,000	150mA at 24Vdc	SPST: NO	Solder Lug	0.540 to 0.480 [13,72 to 12,20]
30-200	Threaded Panel Mount	500,000	150mA at 24Vdc	SPST: NO	Solder Lug	0.540 to 0.480 [13,72 to 12,20]
30/46	Decorator Line with Attractive Front Bezel	Up to 1,000,000	1 Amp at 115 Vac for long life version	SPST: NO & NC	Solder Lug	0.710 to 1.204 [18,03 to 30,58]
32	Stackable PCB Mount Switches with LED	100,000	150mA at 28 Vdc	SPST: NO & NC SPDT: BBM	Surface Mount	N/A
38H	Miniature, PCB Mount, Sealed Plunger Option	80,000	0.4VA at 20 Vac or Vdc	SPST: NO SPDT: NO/NC	Surface Mount	N/A
39-2X	Miniature 2 Circuit Switch, Horizontal Mount	500,000	250mA at 115 Vac	SPST: NO & NC SPDT: BBM	Surface Mount	N/A
39-5X	Long Life 0.25-inch Switch	1,000,000	150mA at 28 Vdc	SPST: NO	Surface Mount	N/A
39-LIMIT	Adjustable Location Settings, Plunger Seal	Up to 500,000	500mA at 115 Vac for long life version	SPST: NO & NC	Solder Lug	0.517 to 0.707 [13,14 to 17,96]
39-X	Minimal Behind Panel, Available Sealed	Up to 1,000,000	500mA at 115 Vac for long life version	SPST: NO & NC	Solder Lug	0.215 to 0.429 [5,47 to 10,90]

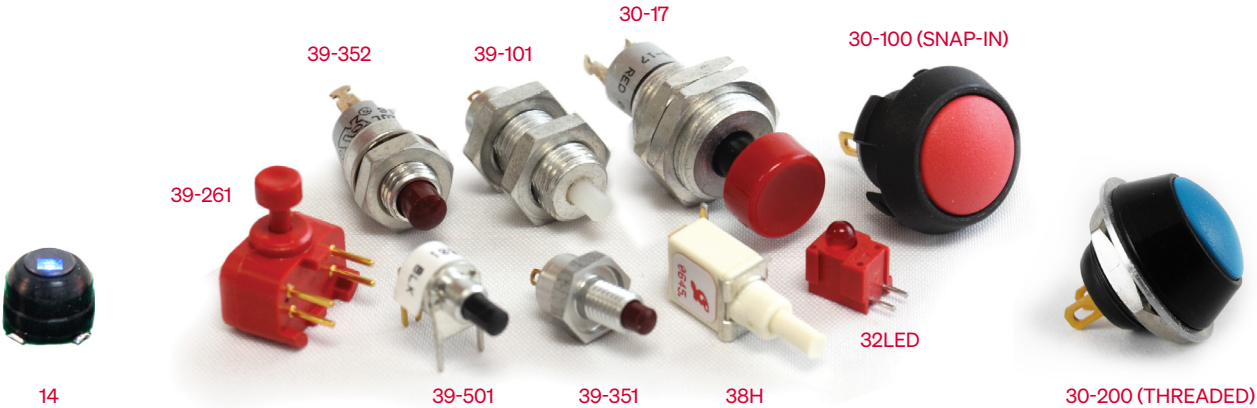

TACT, TOGGLE, ROCKER AND SLIDE SWITCHES

GRAYHILL TACT SWITCHES ARE MOMENTARY PUSHBUTTONS DESIGNED FOR COST-EFFECTIVE SWITCHING.

They are mounted to a printed circuit board and typically actuated by a decorative keycap. The ultraminiature and lightweight structure of these tact switches make them suitable for high density mounting. These switches are available in industry standard designs to allow for easy integration.


- Common Features:**

 - Excellent tactile feedback
 - Insert molded terminals on tacts prevents flux buildup during soldering
 - Choice of actuators, forces and heights
 - Choice of bushings and terminations
- Typical applications include:**

 - Telecommunications
 - Industrial products
 - Laboratory equipment
 - Back-office equipment
 - Handsets
 - Industrial reset switches

TACTILE SWITCHES

Series	Features	Life Rating (cycles)	Operating Force (grams)	Height inches [mm]	Termination
95C04	6mm x 3.5mm	50,000	160, 320	0.169 to 0.197 [4,30 to 5,00]	SMT, Thru-Hole
95C05	5mm Square	50,000	160	0.059 [1,49]	SMT
95C06	6mm Square, Non-Washable	Up to 500,000	100, 160, 260, 320, 520	0.169 to 0.512 [4,29 to 13,00]	SMT, Thru Hole, Right Angle
95C12	12mm Square	Up to 500,000	160, 260	0.169 to 0.335 [4,29 to 8,51]	SMT, Thru-Hole
95CW06	6mm Square, Washable	Up to 500,000	160, 180, 260, 360, 520	0.091 to 0.205 [2,30 to 5,20]	SMT, Thru-Hole, Right Angle, J-Lead

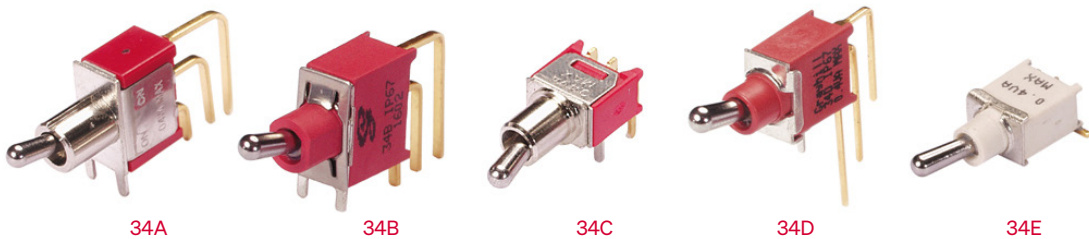

TACT, TOGGLE, ROCKER AND SLIDE SWITCHES


TOGGLE SWITCHES

Series	Features	Contact Rating (maximum)	Life Rating (cycles)	Circuitry Options	Termination
34A	Miniature 12,7mm Length	Up to 5A at 125 VAC	40,000	SPDT, DPDT, 3PDT, 4PDT	Solder Lug, PC Mount, Wire Wrap
34B	Miniature, Sealed per IP67	Up to 5A at 125 VAC	30,000	SPDT, DPDT, 3PDT	Solder Lug, PC Mount
34C	Sub-Miniature 8,13mm Length	Up to 3A at 125 VAC	30,000	SPDT, DPDT	Solder Lug, PC Mount
34D	Sub-Miniature, Sealed per IP67	Up to 3A at 125 VAC	30,000	SPDT, DPDT	PC Mount
34E	Sealed Surface Mount per IP67	0.4 VA at 20VAC or DC	30,000	SPDT	Surface Mount




ROCKER SWITCHES

Series	Features	Contact Rating (maximum)	Life Rating (cycles)	Circuitry Options	Termination
47A	Miniature 12,7mm Length	Up to 5A at 125 VAC	50,000	SPDT, DPDT, 3PDT, 4PDT	Solder Lug, PC Mount
47B	Miniature, Sealed per IP67	Up to 5A at 125 VAC	30,000	SPDT, DPDT, 3PDT	Solder Lug, PC Mount
47C	Sub-Miniature 8,13mm Length	Up to 3A at 125 VAC	30,000	SPDT, DPDT	Solder Lug, PC Mount
47D	Sub-Miniature, Sealed per IP67	Up to 3A at 125 VAC	50,000	SPDT, DPDT	PC Mount

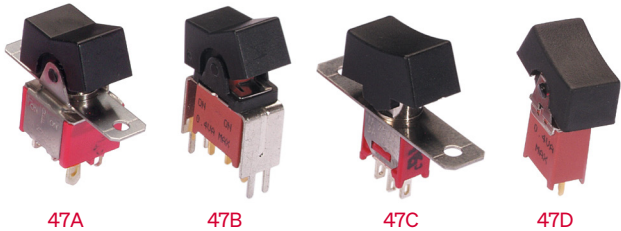

SLIDE SWITCHES

Series	Features	Contact Rating (maximum)	Life Rating (cycles)	Circuitry Options	Termination
48A	Miniature 12,7mm Length	Up to 5A at 125 VAC	30,000	SPDT, DPDT	Solder Lug, PC Mount
48B	Sub-Miniature 8,13mm Length	Up to 3A at 125 VAC	30,000	SPDT	PC Mount

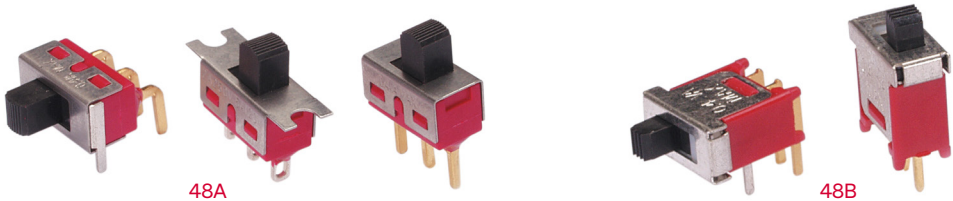

DIP SWITCHES

GRAYHILL IS THE WORLD LEADER IN DIP SWITCH TECHNOLOGY.

Consistent high contact pressure is achieved with a spring and ball contact system on select series. Other features include a standard base seal, optional top-tape seal, and can also come in tape and reel packaging. Our DIP switches can be customized for your specific application.

SURFACE MOUNT

Series	Features	Positions	Actuation Type	Circuitry	Life Rating (cycles)
76HP	PIANO_DIP	2, 4, 6, 8, 10	Side Actuated Toggle	SPST	2,000
78H	Standard DIP Package	1 - 5	Top Actuated Slide	SPST, DPST	2,000
90HB	Low Profile	2 - 10	Top Actuated, Recessed Slide	SPST	2,000
97	Half-Pitch	2, 4, 6, 8, 10	Top Actuated, Recessed Slide	SPST	1,000


THRU-HOLE

Series	Features	Positions	Actuation Type	Circuitry	Life Rating (cycles)
76	Sealed Base, Spring & Ball, Top Tape Seal Option	2 - 10, 12	Raised/Recessed, Top/Side, Rocker/Toggle/PIANO	SPST, SPDT, DPDT	2,000
78	Sealed Base, Spring & Ball, Top Tape Seal Option	2 - 10, 12	Raised/Recessed, Top, Slide/Rocker	SPST, 2PST, 3PST, 4PST, SPDT, DPDT	2,000
78C	Right Angle	2 - 10, 12	Raised Slide	SPST	2,000
90B	Machine Insertable MIDIP	2 - 10	Top Actuated, Recessed Slide	SPST	2,000

ROTARY

Series	Features	Positions	Actuation Type	Circuitry	Life Rating (cycles)
94H	Sealed with Coded Output	8, 10, 16	Flush or Extended, Top or Side	Octal, BCD & Hexadecimal	10,000
94R	Coded Output with Shaft	8, 10, 16	Side Actuated Shaft	Octal, BCD & Hexadecimal	10,000

- Customization can include:
- Custom printing
 - Special packaging
 - New designs and form-factors

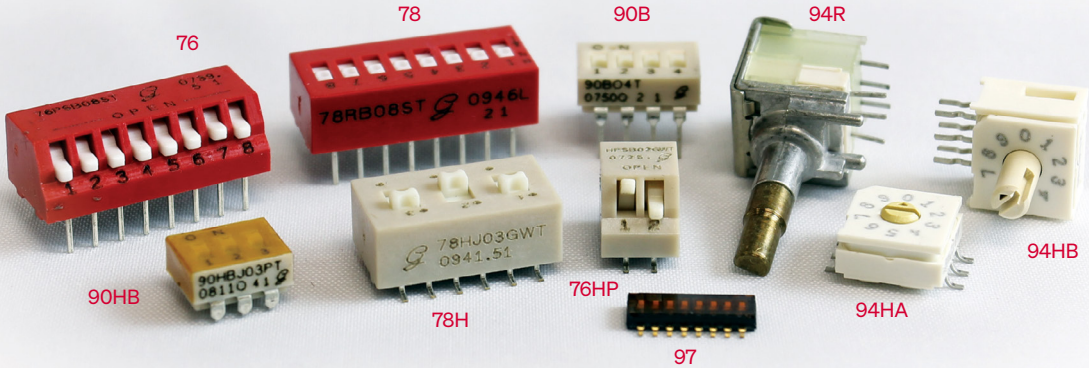





I/O MODULES AND RACKS

GRAYHILL OFFERS I/O MODULES IN THE INDUSTRY STANDARD SIZES OF MINI, STANDARD AND G5.

Grayhill also offers its unique OpenLine style I/O module that offers two input/output points per snap-in module. This not only saves space but also offers quick and tool-free assembly and modification. Grayhill's I/O Racks are available in industry standard size as well as a miniature footprint size to save panel space.

MODULES

Series	Features		Types	Logic Voltage Rating	Unique Options	Agency Approvals
70	Industry Standard pin out		AC In	3-6, 8-18, 15-30	120 or 220 Vac	UL, CSA, TUV
			AC Out	2.5-10, 10-18, 15-30	120 or 220 Vac, heavy inductive load	
			DC In	3.5-6, 3-6, 8-18, 15-30	Polar and non-polar, fast	
			DC Out	2.5-9, 2.5-10, 10-18, 15-30	Electromechanical relay, low leakage	
70M	Saves 35% space		AC In	3-6, 8-18, 15-30	120 or 220 Vac	UL, CSA, TUV
			AC Out	2.5-10, 10-18, 15-30	120 or 220 Vac, heavy inductive load	
			DC In	3.5-6, 3-6, 8-18, 15-30	Polar and non-polar, fast	
			DC Out	2.5-9, 2.5-10, 10-18, 15-30	Electromechanical relay, low leakage	
70G	Fused outputs, integral LED		AC In	4.5-6, 10-18, 17-30	120 or 220 Vac	UL, CSA, TUV
			AC Out	4-6, 8-20, 18-32	120 or 220 Vac, heavy inductive load, manual override	
			DC In	4.5-6, 10-18, 17-30	Polar and non-polar, fast, dry contact	
			DC Out	4-6, 10-20, 18-32	Electromechanical relay, low leakage, manual override	
70L	Two channel fused outputs, integral LED, mix digital and analog		AC In	4.5-28	120 or 220 Vac	UL, CSA
			AC Out	4.5-28	120 or 220 Vac, heavy inductive load	
			DC In	4.5-28	Polar and non-polar, fast	
			DC Out	4.5-28	Electromechanical relay	

RACKS

Series	Features	Channels	Agency Approvals
70	Industry standard footprint	4, 8, 16, or 24 Channel	UL, CSA
70M	Miniature footprint	4, 8, 16, or 24 Channel	UL, CSA
70G	Fuses and LEDs on modules	4, 8, 16, 24 or 32 Channel	UL, CSA
70L	Highest Density	4, 8, 16, or 24 Channel	UL, CSA



EVERYTHING CLICKS.

→ **Corporate Headquarters**

561 West Hillgrove Avenue
La Grange, Illinois 60525 USA
(+1) 708-354-1040

→ **Manufacturing Plant**

4800 Vernon Avenue
McCook, Illinois 60525 USA
(+1) 708-354-1040

→ **Manufacturing Plant**

459 Maple Avenue
Carpentersville, Illinois 60110 USA
(+1) 847-428-6990

→ **Manufacturing Plant**

165 Depot Street
Iola, Wisconsin 54945 USA
(+1) 715-445-3272

→ **Manufacturing Plant**

44-1, Xintang Road, Fuhai Street
Baoan District, Shenzhen, Guangdong, China
(+011) 86-755-2732

