




SWITCHING THE SMART WAY

Sensor Technology

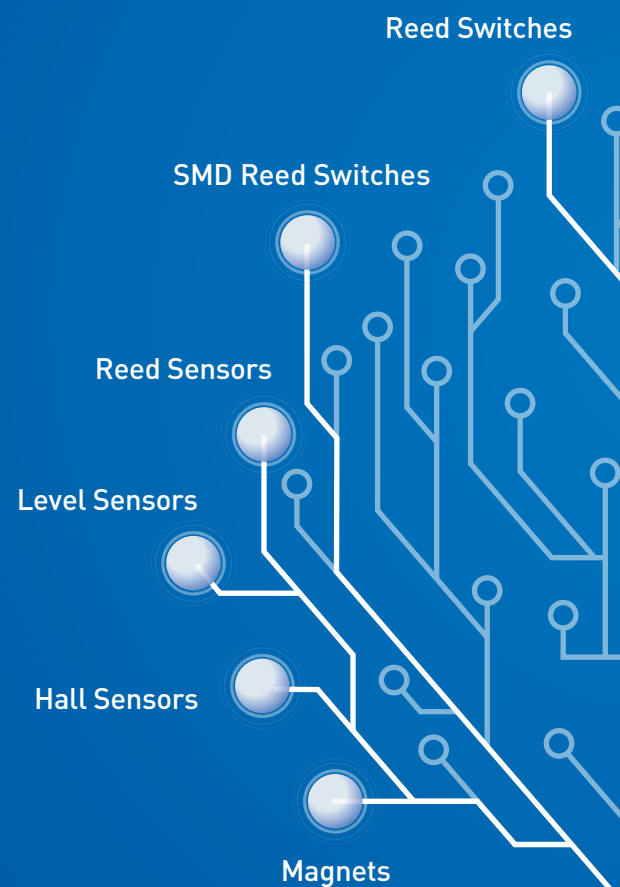

Welcome to PIC



Our work is never done. Passion, respect, integrity and discipline are the four core values which drive us to sophisticated products and continuous growth in a globalized world.

P

Product Innovation

I


Intelligent Design

C

Creative Manufacturing

Innovation

Modern machinery, perfected production concepts, clear information policy and our comprehensive sensor know-how secure our premier position in the branch.

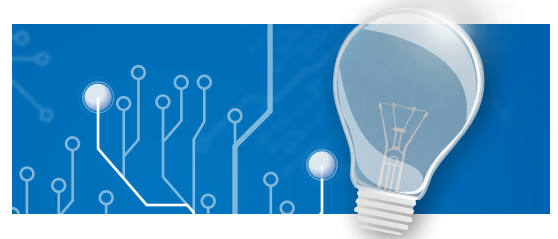

Quality

Continuous optimization in the areas of research, development, production, service and marketing assure high standards in product quality.






Sustainability

Sustainability is an essential part of our philosophy. Careful use of resources and environmental compatibility starts long before production and does not finish at sale. We remain true to this principle with regard to social and economic aspects.




Table of Contents

5-7	Reed Switches		Reed Switch Basics5 Micro / Standard6 Power / Special7
8-12	SMD Reed Switches		S-Series8 T-Series9 Z-Series10 TH-Series11 PRX+2-Series12
13-21	Reed Sensors		Reed Sensor Basics13 Snap-fit14 Flatpack 15-16 Through Hole17 Tubular18 Tubular Threaded 19-20 Press-fit 21
22-27	Level Sensors		Level Sensor Basics 22 PLS-PP-Series 23-24 PLS-PA-Series 25 PLS-VA-Series 26 PLS-PP Horizontal 27
28-31	Hall Sensors		Hall Sensor Basics 28 Flatpack 29 Tubular Threaded 30 Flange Mount 31
32-34	Magnets		Actuators 32-33 Magnet Selector 34
35	Customized Products		Connectors and cable assemblies 35 Special housings 35 PCB-Assemblies 35 Customized Level Sensors 35 Magnets 35
36-38	Tech Center		Reed Switches: How to operate 36 Reed Switches: Precautions 37 Housing Materials: Chemical resistance chart 38
39	Contact		

Reed Switch Basics



Different forms

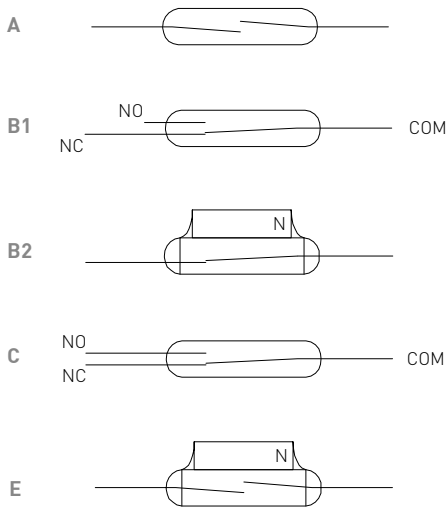

Form A

Normally open, Reed Switch will close contact in presence of a magnet.

Form B

Normally closed. Either achieved by using a Form C switch with the NO wire cut off or by using an attached magnet (requires pole oriented actuation).

Form C


Change over, Reed Switch will change from NC to NO contact in presence of a magnet.

Form E

Latching type. Switching status remains stable after a magnetic field disappears until a magnet with opposite polarity approaches.

How does a Reed Switch work?

A Reed Switch consists of a pair of ferromagnetic reeds, hermetically sealed in a glass tube. Their free ends overlap at a very small distance.

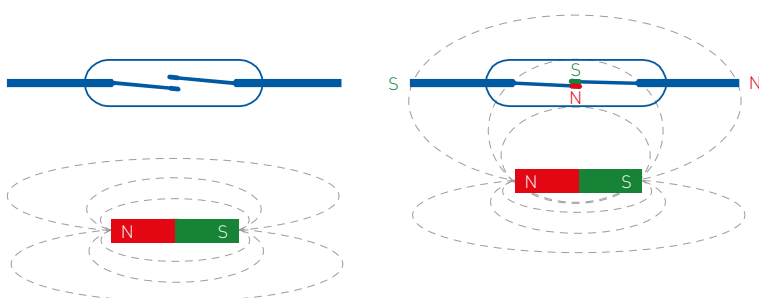

Benefits

- > No power supply required
- > Contacts hermetically sealed
- > Most economic non-touch switching solution
- > Not ESD sensitive
- > Various methods of actuation possible
- > Magnetic and electrical pole independent
- > Non-touch actuation permits smooth surfaces and modern design
- > Various sensitivity ranges available



Applications



Micro / Standard

Features

- PMC-0701 for limited space the 7 mm glass length offers best solution
- PMC-1401 most cost-efficient general purpose switch using 14 mm glass length
- Close differential and mains voltage types available

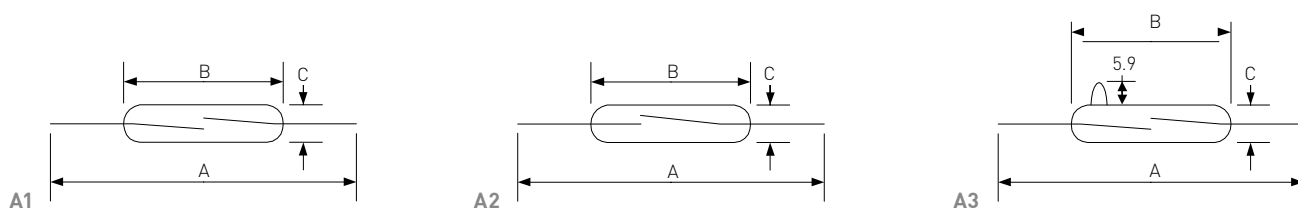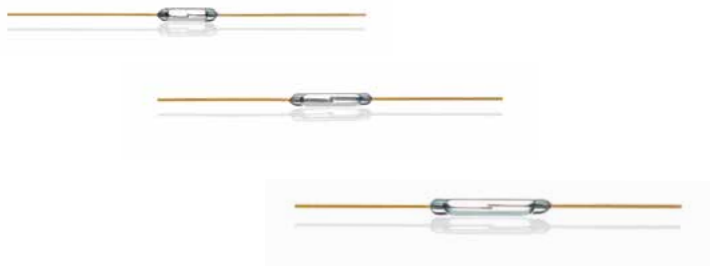

		Micro Switches				Standard Switches						
		HSR-0025	HSR-0035RT	PMC-0701	HSR-502	PMC-1001	PMC-1401	PMC-1402 DO min. 60%!	PMC-2003 DO max. 60%!	PMC-1515 Mains Voltage	PMC-1496	TRH-200
Dimensions												
A = Total length nom.	mm	26.7	26.7	41.5	37.9	41.5	44.0	44.3	45.6	40.4	55.0	52.5
B = Glass length max.	mm	4.32	5.08	7.0	8.0	10.0	14.2	14.0	21.0	15.3	14.5	14.8
C = Glass diameter max.	mm	0.97x1.27	1.4	1.8	2.4	1.8	2.3	2.3	3.0	2.3	2.2	2.7
Contact arrangement (figure)		A2	A2	A1	C2	A1	A1	A1	A1	A1	C2	C2
Characteristics												
Contact form		A	A	A	C	A	A	A	A	A	C	C
Contact rating max.	W / VA	0.25	1	10	2	10	10	10	10	10	20	5
Switching voltage max.	VDC	30	30	150	30	180	200	200	180	200	150	175
	VAC	20	30	120	30	130	140	140	130	260	140	120
Switching current max.	A	0.01	0.05	0.5	0.1	0.7	1	0.5	1	0.3	1	0.25
Carry current max.	A	0.7	1	0.7	1	1	1.2	1	2	1.4	2	1.5
Breakdown voltage min.	VDC	80	200	200	200	200	240	250	250	400	200	200
Contact resistance (initial) max.	mΩ	750	750	200	200	150	100	100	150	100	150	100
Performance												
Pull in range available	AT	2-15	5-20	10-20	15-35	10-25	10-30	10-20	30-50	20-30	15-30	15-30
Drop out min.	AT	1	3	4	5	4	5	60% of PI	30% of PI	4	6	5
Environmental												
Switching frequency max.	Hz	900	700	600	100	500	500	500	400	400	100	100
Vibration (50-2000 Hz)	g	15	15	10	30	20	20	30	20	30	30	30
Shock (1/2 sin 11 ms)	g	75	75	50	50	100	100	100	50	100	50	50
Operating Temperature	°C	-40 to +125					-60 to +155	-40 to +125		-20 to +125	-40 to +130	-40 to +125
UL / CSA / RoHS		--/--/•	--/--/•	•/•/•	--/--/•	•/•/•	•/•/•	•/•/•	•/•/•	•/•/•	--/--/•	--/--/•



AT ranges and characteristics stated for unmodified Reed Switches.

Pls. refer page 36/37 for additional technical information. All dimensions in mm. Subject to change without prior notice.

Power / Special

Features

- Switching voltage up to 10 kV
- Carry current up to 5 A
- Contact rating max. 250 Watts
- Normally open, change over and latching types

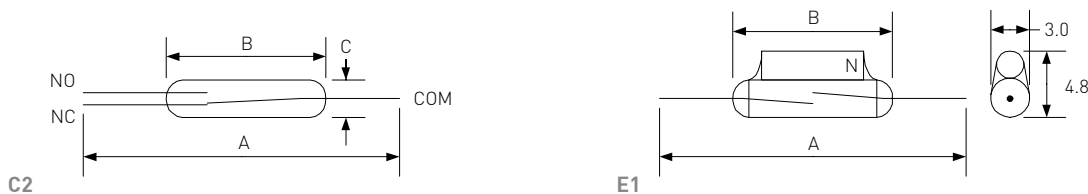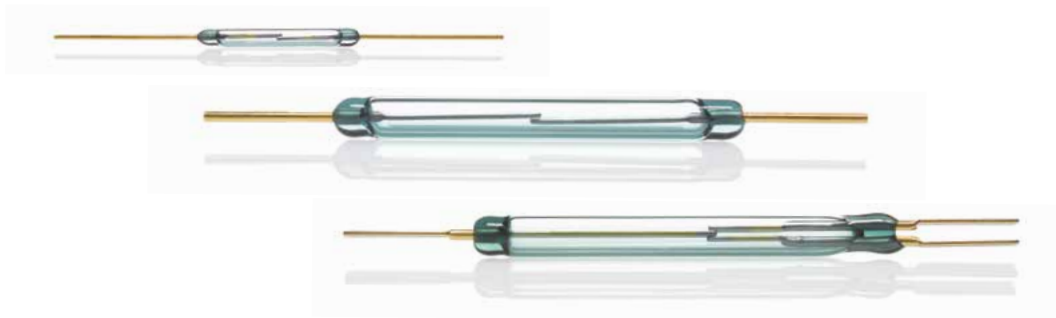

		Power Switches						Special Switches			
								High voltage			Latching
		PMC-2021	PMC-3617	PMC-5001	PMC-5002	PMC-5025	HSR-834WT	HSR-V7K	HSR-V10K	HSR-V15K	PMC-1401X
Dimensions											
A = Total length nom.	mm	55.0	70.0	80.0	80.0	80.0	86.0	82.0	82.0	82.0	44.0
B = Glass length max.	mm	20.0	36.0	50.0	50.0	52.0	34.3	53.4	53.4	53.4	14.2
C = Glass diameter max.	mm	2.54	5.6	5.4	5.4	5.6	5.33	5.4	5.4	5.4	
Contact arrangement (figure)		A1	C2	A1	A1	C2	C2	A3	A3	A3	E1
Characteristics											
Contact form		A	C	A	A	C	C	A	A	A	E
Contact rating max.	W / VA	50	60	120	250	60	100	50	50	50	5
Switching voltage max.	VDC	200	400	250	250	230	500	4000	5000	6000	140
	VAC	250	400	250	250	230	500	2800	3500	4200	100
Switching current max.	A	1.5	1	3	5	1	3	3	3	3	0.5
Carry current max.	A	2	2	3	5	2	3	4.5	4.5	4.5	0.7
Breakdown voltage min.	VDC	400	1000	700	700	400	1000	7000	10000	15000	200
Contact resistance (initial) max.	mΩ	100	100	200	200	100	500	150	150	150	150
Pull in range available	AT	25-40	50-80	50-90	50-100	80-120	60-100	60-125	100-150	130-170	
Drop out min.	AT	5	20	20	15	20	30	20	30	40	
Switching frequency max.	Hz	300	100	25	5	100	50	50	50	50	500
Vibration (50-2000 Hz)	g	20	35 ¹⁾	10 ²⁾	10 ²⁾	35 ¹⁾	15	30	30	30	10
Shock (1/2 sin 11 ms)	g	50	50	150 ³⁾	150 ³⁾	50	10	100	100	100	50
Operating Temperature	°C	-60 to +125	-40 to +125	-60 to +130	-60 to +100	-40 to +125	-25 to +125	-60 to +125			-40 to +125
UL / CSA / RoHS		•/•/•	--/--/•	•/•/•	•/•/•	--/--/•	•/•/•	--/--/•	--/--/•	--/--/•	--/--/•

AT ranges and characteristics stated for unmodified Reed Switches.

Pls. refer page 36/37 for additional technical information. All dimensions in mm. Subject to change without prior notice.


¹⁾ 10-1000 Hz ²⁾ 1-500 Hz ³⁾ 1/2 sin 2 ms



S-Series

Features

- Most economic Reed Switch for automated assembly
- Assembly in PCB cutout reduces height above PCB by approx. 50%
- Various sensitivity ranges and total lengths variants

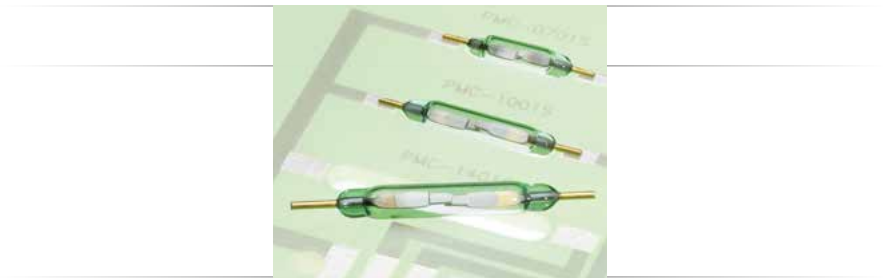





		PMC-0701S	PMC-1001S	PMC-1401S	PMC-2021S
Contact form		A	A	A	A
Contact rating max.	W / VA	10	10	10	50
Switching current max.	A	0.5	0.7	1	1.5
Switching voltage max.	VDC	150	180	200	200
	VAC	120	130	140	250
Pull in range available	AT	10-20	10-25	10-25	25-40
UL / CSA / RoHS		•/•/•	•/•/•	•/•/•	•/•/•
Packing unit	pcs	3000	3000	5000	2500

PMC-0701S





PMC-1001S

PMC-1401S




PMC-2021S

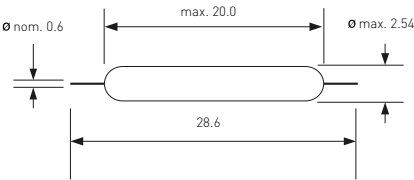

PCB cutout



Recommended pad size



AT ranges and characteristics stated for unmodified Reed Switches.
Pls. refer page 36/37 for additional technical information. All dimensions in mm. Subject to change without prior notice.

T-Series




Features

- Attractively priced alternative to molded Reed Switches
- No PCB redesign required since direct substitute for molded competitors types
- Various sensitivity ranges available


		HSR-0025TSM	PMC-0701TS	PMC-1001T/TS	PMC-1401T/TS	PMC-2021T
Contact form		A	A	A	A	A
Contact rating max.	W / VA	0.25	10	10	10	50
Switching current max.	A	0.01	0.5	0.7	1	1.5
Switching voltage max.	VDC	30	150	180	200	200
	VAC	20	120	130	140	250
Pull in range available	AT	2-15	10-20	10-25	10-25	25-40
UL / CSA / RoHS		--/--/•	•/•/•	•/•/•	•/•/•	•/•/•
Packing unit	pcs	200	5000	5000	2500	2500

HSR-0025TSM




Recommended
pad size


PMC-0701TS



PMC-1001TS

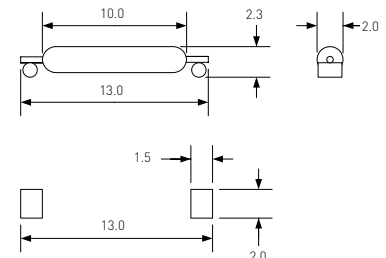


PMC-1001T

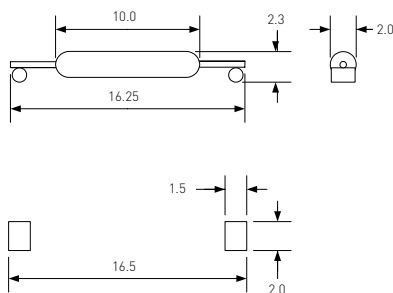


Recommended
pad size

PMC-1401TS

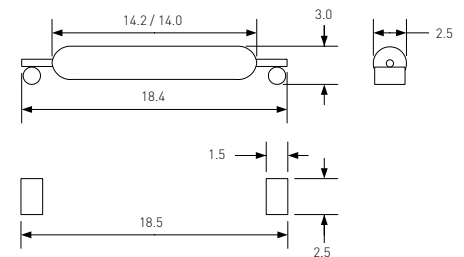


PMC-1401T

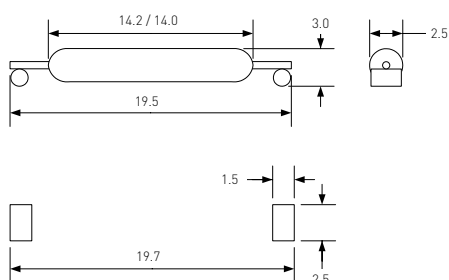

Recommended
pad size

PMC-2021T

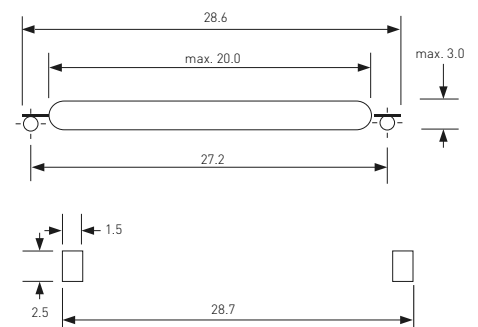

AT ranges and characteristics stated for unmodified Reed Switches.
Pls. refer page 36/37 for additional technical information. All dimensions in mm. Subject to change without prior notice.



Z-Series


Features

- Designed to lay in PCB cut out
- Smallest height over PCB with only 0.45 mm for PMC-0701Z
- Improved mechanical protection for glas body




		PMC-0701Z	PMC-1001Z	PMC-1401Z	PMC-2021Z	PMC-1001ZHL
Contact form		A	A	A	A	A
Contact rating max.	W / VA	10	10	10	50	10
Switching current max.	A	0.5	0.7	1	1.5	0.7
Switching voltage max.	VDC	150	180	200	200	180
	VAC	120	130	140	250	130
Pull in range available	AT	10-20	10-25	10-25	25-40	10-25
UL / CSA / RoHS		-- / -- / •	-- / -- / •	-- / -- / •	-- / -- / •	-- / -- / •
Packing unit	pcs	5000	5000	5000	2500	2500


PMC-0701Z

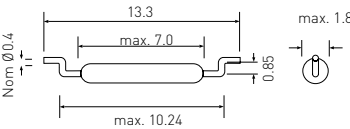


PMC-1001Z







PMC-1401Z







PMC-2021Z

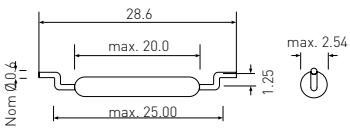


PCB cutout




Recommended pad size

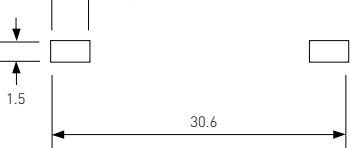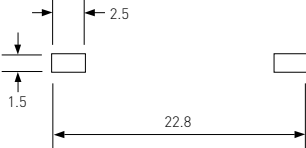

PMC-1001ZHL

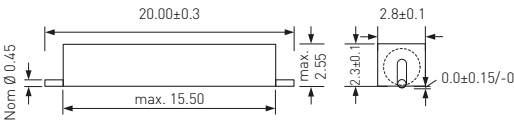


Recommended pad size

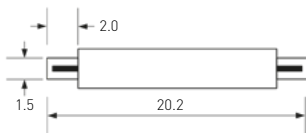

AT ranges and characteristics stated for unmodified Reed Switches.
Pls. refer page 36/37 for additional technical information. All dimensions in mm. Subject to change without prior notice.

TH-Series

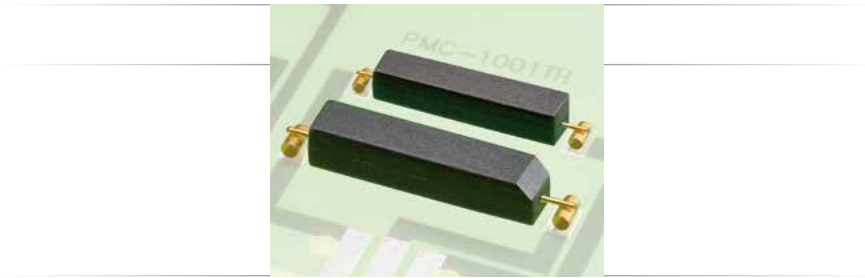


Features


- Replaces various molded competitors types, thus no PCB redesign required
- Latching and Form B (normally closed) types available
- Various sensitivity ranges available

		PMC-0508TH	PMC-0701TH	PMC-1001TH PMC-1001THL	Normally closed PMC-1001THY	Latching PMC-1424THX
Contact form		A	A	A	B	E
Contact rating max.	W / VA	5	10	10	10	5
Switching current max.	A	0.25	0.5	0.7	0.7	0.5
Switching voltage max.	VDC	175	150	180	180	140
	VAC	140	120	130	130	100
Pull in range available	AT	5-15	10-20	10-25	consult factory	consult factory
UL / CSA / RoHS		--/--/•	•/•/•	•/•/•	•/•/•	•/•/•
Packing unit	pcs	2500	2500	2500	2000	2000





PMC-0508TH




PMC-0701TH




PMC-1001TH

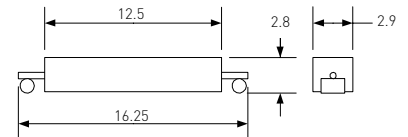Recommended
pad size




PMC-1001THL



PMC-1001THY



PMC-1424THX

Recommended
pad size


AT ranges and characteristics stated for unmodified Reed Switches.
Pls. refer page 36/37 for additional technical information. All dimensions in mm. Subject to change without prior notice.



PRX+2-Series


Features

- > Ultra miniature size
- > Hi-Rel versions available
- > Various sensitivity ranges available

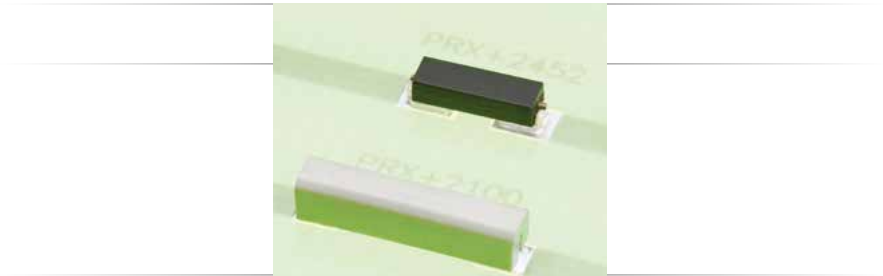


		PRX+2463	PRX+2131
Contact form		A	A
Contact rating max.	W / VA	0.25	1
Switching current max.	A	0.01	0.05
Switching voltage max.	VDC	30	30
	VAC	20	30
Pull in range available	AT	5-15	5-20
UL / CSA / RoHS		--/--/•	--/--/•



PRX+2463



PRX+2131



Recommended pad size



AT ranges and characteristics stated for unmodified Reed Switches.
Pls. refer page 36/37 for additional technical information. All dimensions in mm. Subject to change without prior notice.


Reed Sensor Basics



How does a Reed Sensor work?

A Reed Sensor incorporates a Reed Switch inside a metal or plastic housing for better mechanical protection and easier mounting.

Actuation principles for Reed Switches also apply to Reed Sensors.

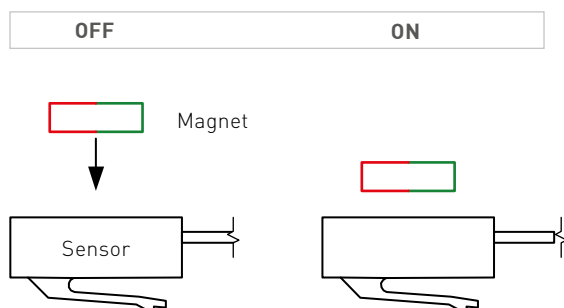

Benefits

- › Mechanically protected
- › Wide range of housing types available
- › No power supply required
- › Not ESD sensitive
- › Non-touch actuation permits smooth surfaces and modern design
- › Various sensitivity ranges available

We supply Reed Sensors to any requirement: for snap-fit or screw mounting, with special cable and connector etc.

Applications




Snap-fit

Features


- Easily mountable and removable as no tools or screws required
- Small size
- Various sensitivity ranges available
- Customized types available



		MS-320
Contact form		A
Contact rating max.	W / VA	10
Switching current max.	A	0.7
Switching voltage max.	VDC	180
	VAC	130
Pull in range available	AT	10-25
Operating Temperature	°C	-20 to +85
UL / CSA / RoHS		• / • / •
Housing material		PA66-GF
Cable type		AWG 22

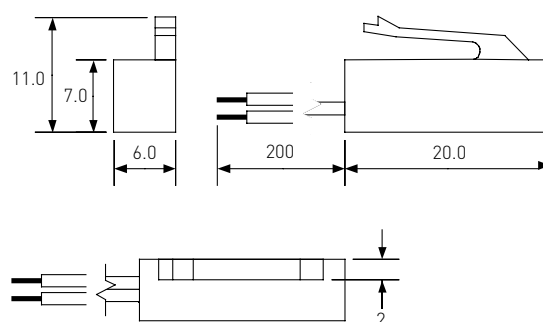

		MS-390-3	MS-390-4	MS-390-5
Contact form		A	C	A
Contact rating max.	W / VA	10	5	10
Switching current max.	A	1	0.25	0.3
Carry current max.	A	1.2	1.5	1.4
Switching voltage max.	VDC	200	175	200
	VAC	140	120	260
Breakdown voltage min.	VDC	240	200	400
Operating Temperature	°C	-20 to +85		
UL / CSA / RoHS		-- / -- / •		
Housing material		PC		
Cable type		UL 1007, AWG 22	UL 1061, AWG 24	UL 1007, AWG 22

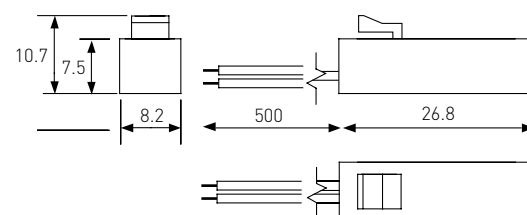

Matching actuators on page 32/33.

Flatpack

Features

- Adjustable switching point
- Replaces various competitors types
- Mains voltage variants available
- Various sensitivity ranges available
- Customized types available



		MS-313-3	MS-324-3	MS-324-4	MS-324-5	MS-324-7
Contact form		A	A	C	A	B
Contact rating max.	W / VA	10	10	5	10	5
Switching current max.	A	0.5	1	0.25	0.3	0.25
Switching voltage max.	VDC	150	200	175	200	175
	VAC	120	140	120	260	120
Pull in range available	AT	10-20	10-25	15-30	15-30	15-30
Operating Temperature	°C	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85
UL / CSA / RoHS		-- / -- / •	• / • / •	• / -- / •	• / • / •	• / • / •



Matching actuators on page 32/33.

	MS-313-3	MS-324
Housing material	ABS	ABS
Cable type	AWG 26	AWG 24 (MS-324-4: AWG 26)


Standard types

Cable exit: right



MS-313-3




MS-313R



MS-324



MS-324R



AT ranges and characteristics stated for unmodified Reed Switches.
Pls. refer page 36/37 for additional technical information. All dimensions in mm. Subject to change without prior notice.



Flatpack



		MS-328-3 MS-332-3	MS-328-4	MS-328-5 MS-332-5	MS-328-6 MS-332-6	MS-328-7 MS-332-7
Contact form		A	C	A	A	B
Contact rating max.	W / VA	10	5	10	50	5
Switching current max.	A	1	0.25	0.3	1.5	0.25
Switching voltage max.	VDC	200	175	200	200	175
	VAC	140	120	260	250	120
Pull in range available	AT	10-25	15-30	15-30	25-40	15-30
Operating Temperature	°C	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85
UL / CSA / RoHS		• / • / •	• / • / •	• / • / •	• / • / •	• / • / •


	MS-328	MS-332
Housing material	PA66-GF	ABS
Cable type	AWG 20 (MS-328-4: AWG 22)	AWG 24

Matching actuators on page 32/33.


Standard types

Cable exit: right


MS-328

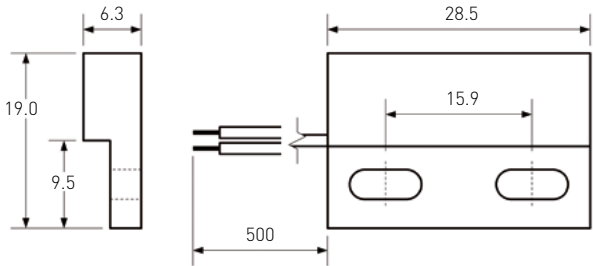

MS-332

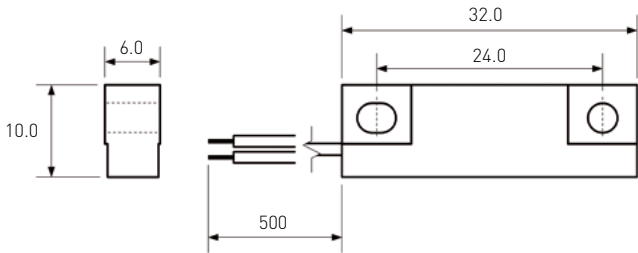

MS-332R

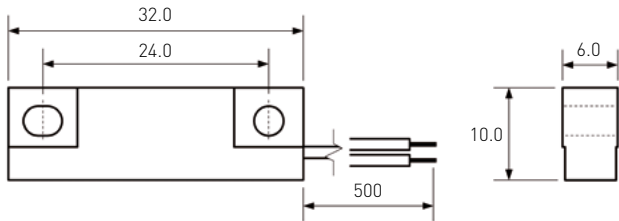

AT ranges and characteristics stated for unmodified Reed Switches.
Pls. refer page 36/37 for additional technical information. All dimensions in mm. Subject to change without prior notice.

Through Hole


Features

- Pitch ranging from 2.54 to 20.32 mm
- Mechanically protected
- Replaces various competitors types
- MK sensor with integrated resistor
- Mains voltage variants available
- Customized types available




		MS-104 MS-105	MS-106 MS-107	MS-108-3	MS-108-4	MS-108-5	MS-110X	MK
Contact form		A	A	A	C	A	E	A
Contact rating max.	W / VA	10	10	10	5	10	5	10
Switching current max.	A	0.5	0.7	1	0.25	0.3	0.5	0.5
Switching voltage max.	VDC	150	180	2w00	175	200	140	150
	VAC	120	130	140	120	260	100	120
Pull in range available	AT	10-20	10-25	10-25	15-30	15-30	consult factory	10-15
Operating Temperature	°C	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-40 to +125
UL / CSA / RoHS		•/•/•	•/•/• --/--/•	•/•/•	•/•/•	•/•/•	--/--/•	--/--/•


MS-104

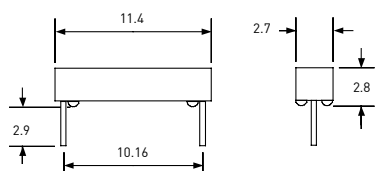


MS-105

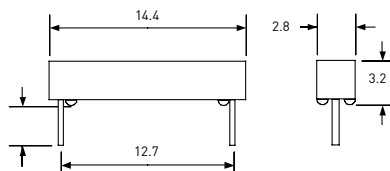


MS-106

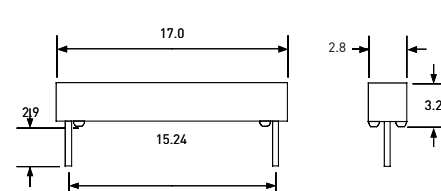


MS-107

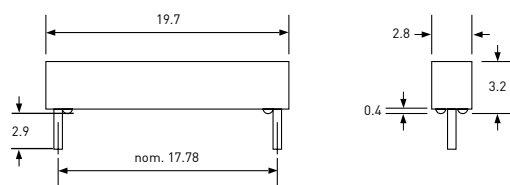


MS-108

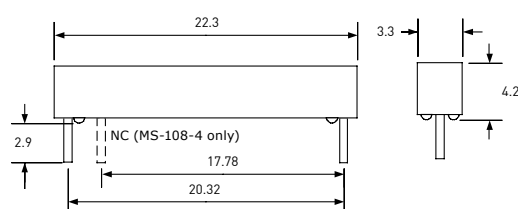

MS-110X

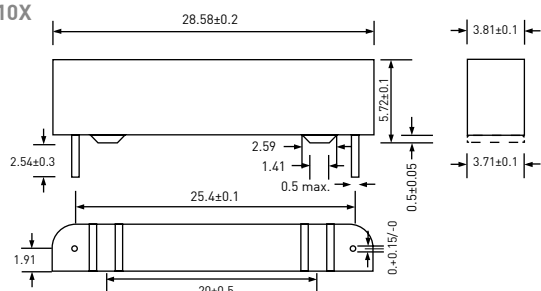

MK with integrated resistor

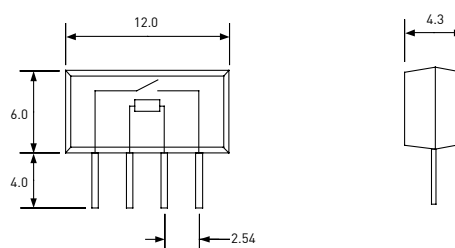

AT ranges and characteristics stated for unmodified Reed Switches.
Pls. refer page 36/37 for additional technical information. All dimensions in mm. Subject to change without prior notice.

Tubular


Features

- Replaces various competitors types
- Mains voltage variants available
- Various sensitivity ranges available
- Customized types available




		PRX+1500	MS-208	MS-209	MS-210	MS-211	MS-213	MS-214
Contact form		A	A	A	A	A	A	A
Contact rating max.	W / VA	1	5	10	10	10	10	10
Switching current max.	A	0.05	0.35	0.5	0.5	0.5	0.7	0.7
Switching voltage max.	VDC	30	175	150	150	150	180	180
	VAC	30	140	120	120	120	130	130
Pull in range available	AT	10-25	5-15	10-20	10-20	10-20	10-25	10-25
Operating Temperature	°C	-40 to +125	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85
UL / CSA / RoHS		--/--/•	--/--/•	--/--/•	--/--/•	--/--/•	•/--/•	•/--/•
Housing material		HTM	ABS	ABS	ABS	ABS	ABS	ABS
Cable type		AWG 28	AWG 30	AWG 30	AWG 26	AWG 26	AWG 26	AWG 26


PRX+1500




MS-208




MS-209

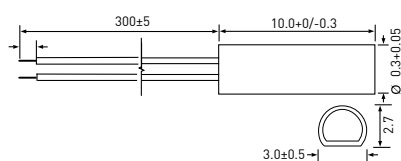


MS-210



MS-211



MS-213




MS-214




		MS-215-3 MS-216-3 MS-217-3	MS-215-4 MS-216-4 MS-217-4	MS-215-5 MS-216-5 MS-217-5	MS-217-6	MS-215-7 MS-216-7 MS-217-7
Contact form		A	C	A	A	B
Contact rating max.	W / VA	10	5	10	50	5
Switching current max.	A	1	0.25	0.3	1.5	0.25
Switching voltage max.	VDC	200	175	200	200	175
	VAC	140	120	260	250	120
Pull in range available	AT	10-25	15-30	15-30	25-40	15-30
Operating Temperature	°C	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85
UL / CSA / RoHS		•/•/•	•/•/•	•/•/•	•/•/•	•/•/•
Housing material		ABS	ABS	ABS	ABS	ABS
Cable type		AWG 24	AWG 24	AWG 24	AWG 24	AWG 24


MS-215



MS-216



MS-217



AT ranges and characteristics stated for unmodified Reed Switches.
Pls. refer page 36/37 for additional technical information. All dimensions in mm.
Subject to change without prior notice.

Tubular Threaded




Features

- > Adjustable switching point
- > Replaces various competitors types
- > Mains voltage variants available
- > Various sensitivity ranges available
- > Customized types available

		MS-225
Contact form		A
Contact rating max.	W / VA	10
Switching current max.	A	0.7
Switching voltage max.	VDC	180
	VAC	130
Pull in range available	AT	10-25
Operating Temperature	°C	-20 to +85
UL / CSA / RoHS		• / - / •
Housing material		Nickel plated brass
Cable type		AWG 28


MS-225

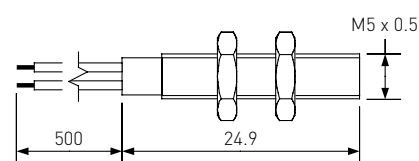

		MS-228-3	MS-228-4	MS-228-5	MS-228-6	MS-228-7
Contact form		A	C	A	A	B
Contact rating max.	W / VA	10	5	10	50	5
Switching current max.	A	1	0.25	0.3	1.5	0.25
Switching voltage max.	VDC	200	175	200	200	175
	VAC	140	120	260	250	120
Pull in range available	AT	10-25	15-30	15-30	25-40	15-30
Operating Temperature	°C	-20 to +85	-20 to +85	-20 to +85	-20 to +85	-20 to +85
UL / CSA / RoHS		• / • / •	• / • / •	• / • / •	• / • / •	• / • / •
Housing material		PA6-GF	PA6-GF	PA6-GF	PA6-GF	PA6-GF
Cable type		AWG 24	AWG 24	AWG 24	AWG 24	AWG 24

Matching actuators on page 32/33.

MS-228

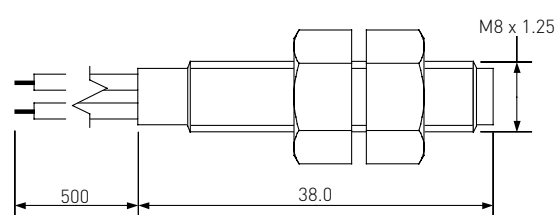


AT ranges and characteristics stated for unmodified Reed Switches.
Pls. refer page 36/37 for additional technical information. All dimensions in mm. Subject to change without prior notice.



Tubular Threaded

Features


- Adjustable switching point
- Rugged design
- Various sensitivity ranges available
- Customized types available

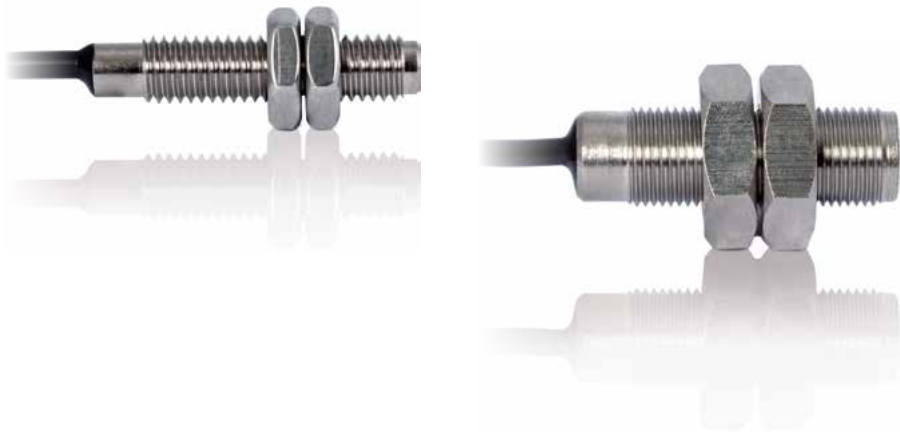


		Power Switch	
		MS-226M-3 MS-228M-3 MS-2210M-3 MS-2212M-3	MS-228M-6 MS-2210M-6 MS-2212M-6
Contact form		A	A
Contact rating max.	W / VA	10	50
Switching current max.	A	1	1.5
Switching voltage max.	VDC	200	200
	VAC	140	250
Pull in range available	AT	10-25	25-40
Operating Temperature	°C	-20 to +85	-20 to +85
UL / CSA / RoHS		--/--/•	--/--/•
Housing material		Nickel plated brass	Nickel plated brass
Cable type		UL 2464, AWG 24 (MS-226M-3: AWG 28)	UL 2464, AWG 24

Matching actuators on page 32/33.


MS-226M

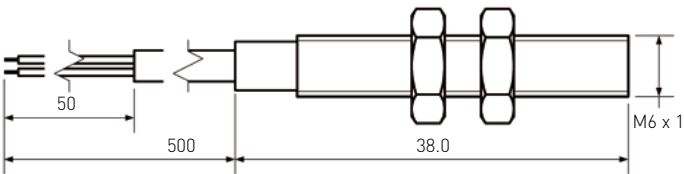


MS-228M

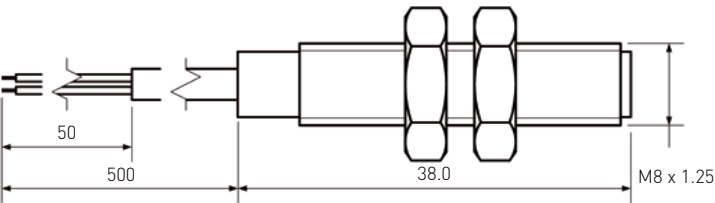

MS-2210M

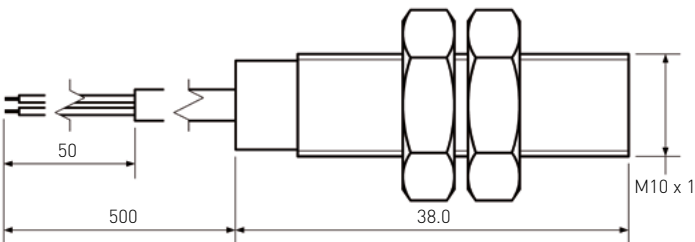

MS-2212M

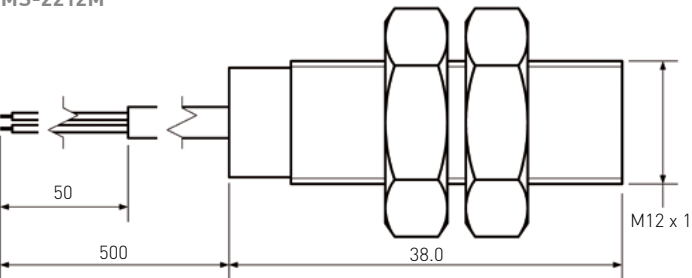

AT ranges and characteristics stated for unmodified Reed Switches.
Pls. refer page 36/37 for additional technical information. All dimensions in mm. Subject to change without prior notice.

Press-fit




Features

- Easily mountable, no tools or screws required
- Various sensitivity ranges available
- Customized sizes and diameters available

		MS-2431-3	MS-2431-4	MS-2431-7
Contact form		A	C	B
Contact rating max.	W / VA	10	3	3
Switching current max.	A	1	0.2	0.2
Switching voltage max.	VDC	200	30	30
	VAC	140	30	30
Pull in range available	AT	10-25	10-30	10-30
Operating Temperature	°C	-20 to +85		
UL / CSA / RoHS		--/--/•		
Housing material		PA-GF		
Cable type		UL 1569, AWG 24		

MS-2431

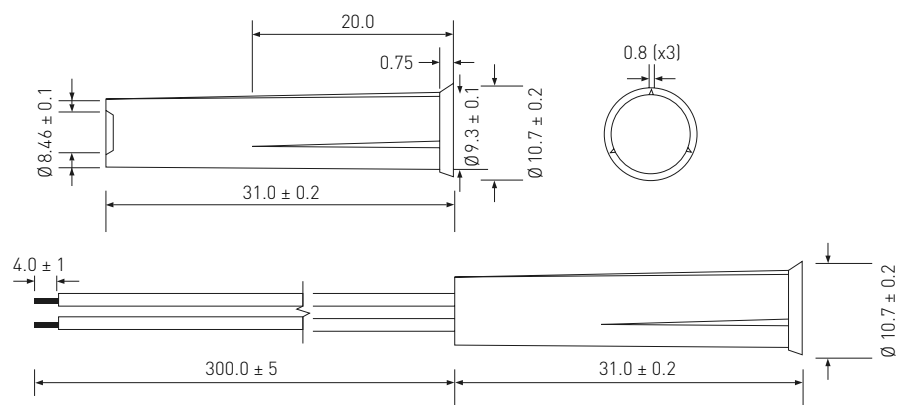

Level Sensor Basics




How does a Level Sensor work?

A Level Sensor incorporates a Reed Switch in a stem. An external float, with a magnet inside, passes and actuates the Reed Switch, depending on liquid level. Actuation principles for Reed Switches also apply to Level Sensors.

Benefits

- › No power supply required
- › Various housing materials available
- › Form A and Form B
- › Suitable for food contact
- › Customized types available

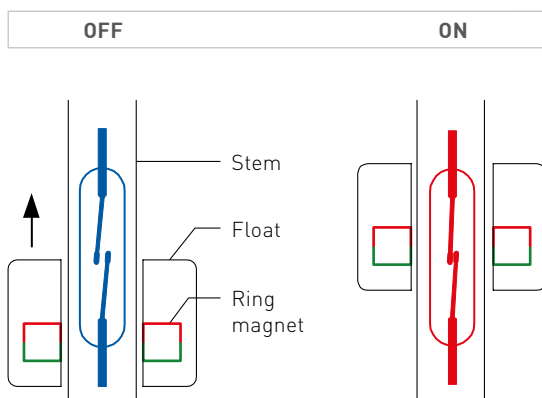

Applications






PLS-PP-Series

IP 67



Features

- Polypropylene housing
- Form A and Form B
- Suitable for food contact
- Covers a wide range of applications
- Customized types available

						Power Switch	
		PLS-020A-3PP	PLS-020B-3PP	PLS-031A-3PP	PLS-031B-3PP	PLS-031A-6PP	PLS-031B-6PP
				PLS-041A-3PP	PLS-041B-3PP	PLS-041A-6PP	PLS-041B-6PP
Contact form		A	B	A	B	A	B
Contact rating max.	W / VA	10		10		50	
Switching current max.	A	0.7		1		1.5	
Carry current max.	A	1		1.2		2	
Switching voltage max.	VDC	180		200		200	
	VAC	130		140		250	
Breakdown voltage min.	VDC	200		240		400	
Operating Temperature	°C	-20 to +80		-20 to +80		-20 to +80	
UL / CSA / RoHS		● / ● / ●		● / ● / ●		● / ● / ●	
Housing material		PP		PP		PP	
Cable type		AWG 24		AWG 24		AWG 22	

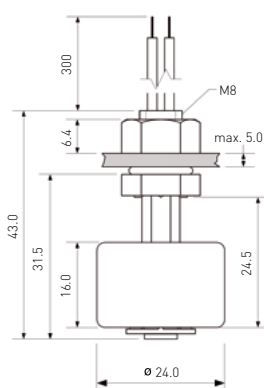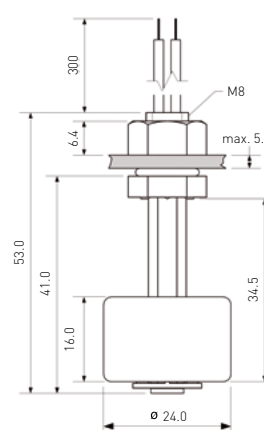PLS-020 – world's smallest!

PLS-031 – Miniature

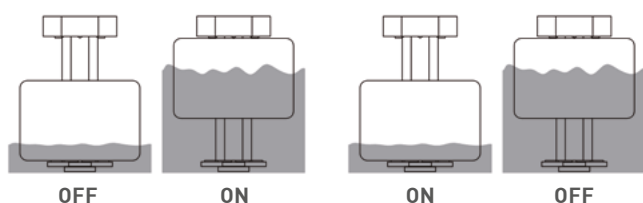PLS-041 – Standard


Variants & mounting

FORM A (Normally open)
FORM B (Normally closed)
Top mounting
Bottom mounting


When mounted „stem up“, operating functions are reversed.


PLS-PP-Series

Features

- › Screw mounting from outside
- › PP float material
- › POM housing material
- › Covers a wide range of applications



				Power Switch	
		PLS-051A-3PPI	PLS-051B-3PPI	PLS-051A-6PPI	PLS-051B-6PPI
Contact form		A	B	A	B
Contact rating max.	W / VA	10		50	
Switching current max.	A	0.5		1.5	
Carry current max.	A	1		2	
Switching voltage max.	VDC	200		200	
	VAC	140		250	
Breakdown voltage min.	VDC	250		400	
Operating Temperature	°C	-20 to +80		-20 to +80	
UL / CSA / RoHS		--/--/•		--/--/•	
Housing material		PP, POM			
Cable type		UL 1007, AWG 24			

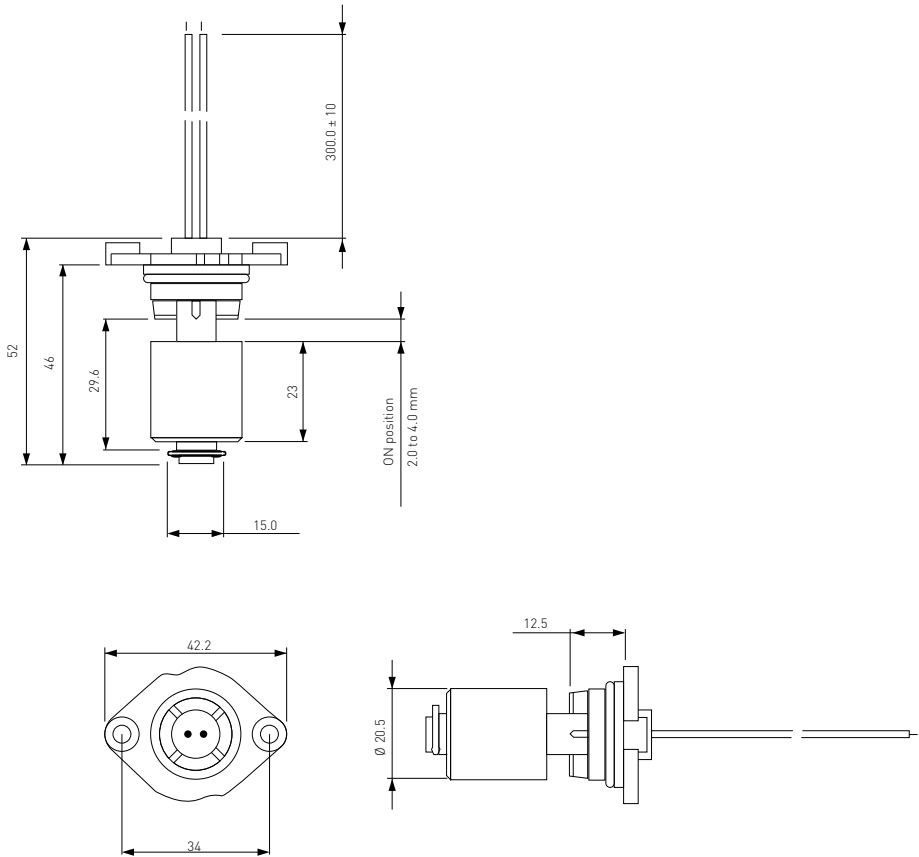



PLS-PA-Series

IP 67



Features

- Polyamide housing
- Form A and Form B
- Extended temperature range
- Customized types available

		Power Switch			
		PLS-031A-3PA	PLS-031B-3PA	PLS-031A-6PA	PLS-031B-6PA
		PLS-041A-3PA	PLS-041B-3PA	PLS-041A-6PA	PLS-041B-6PA
Contact form		A	B	A	B
Contact rating max.	W / VA	10		50	
Switching current max.	A	1		1.5	
Carry current max.	A	1.2		2	
Switching voltage max.	VDC	200		200	
	VAC	140		250	
Breakdown voltage min.	VDC	240		400	
Operating Temperature	°C	-20 to +80		-20 to +80	
UL / CSA / RoHS		• / • / •		• / • / •	
Housing material		PA		PA	
Cable type		AWG 24		AWG 22	

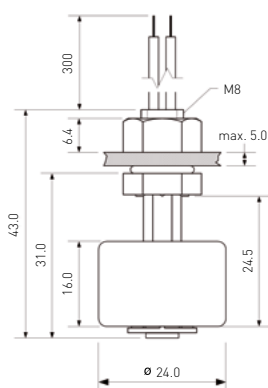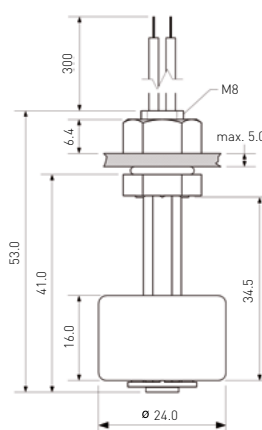PLS-031 – Miniature

PLS-041 – Standard

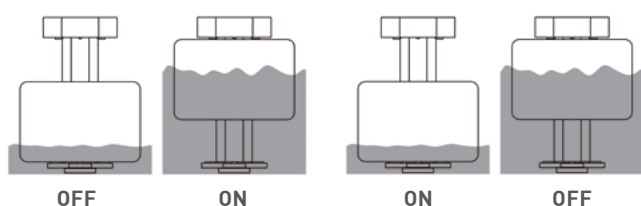
Variants & mounting

FORM A (Normally open)
FORM B (Normally closed)
Top mounting
Bottom mounting


When mounted „stem up“, operating functions are reversed.

PLS-VA-Series

IP 67




Features


- Stainless Steel housing
- Rugged & durable
- Form A and Form B
- Suitable for food contact
- Extended temperature range
- Customized types available

		Power Switch			
		PLS-045A-3VAI	PLS-045B-3VAI	PLS-045A-6VAI	PLS-045B-6VAI
		PLS-080A-3VAL	PLS-080B-3VAL	PLS-080A-6VAL	PLS-080B-6VAL
		PLS-081A-3VAI	PLS-081B-3VAI	PLS-081A-6VAI	PLS-081B-6VAI
Contact form		A		A	
Contact rating max.	W / VA	10		50	
Switching current max.	A	1		1.5	
Carry current max.	A	1.2		2	
Switching voltage max.	VDC	200		200	
	VAC	140		250	
Breakdown voltage min.	VDC	240		400	
Operating Temperature	°C	-40 to +125		-40 to +125	
UL / CSA / RoHS		•/•/•		•/•/•	
Housing material		Stainless Steel 304		Stainless Steel 304	
Cable type		AWG 24		AWG 22	


PLS-045

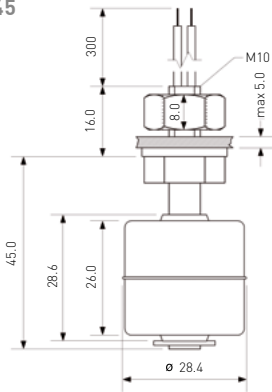

PLS-080

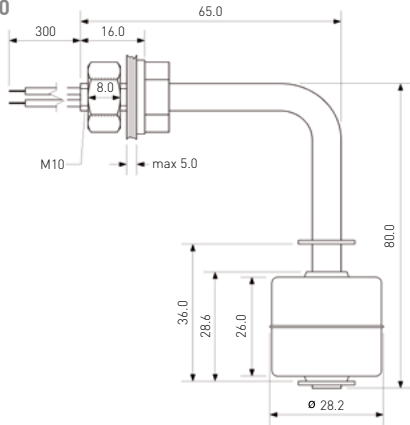

PLS-081

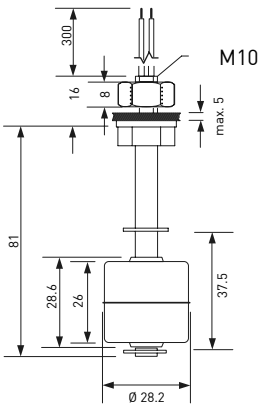

Variants & mounting

FORM A (Normally open)

FORM B (Normally closed)

Top mounting

Bottom mounting

Side mounting

When mounted „stem up“, operating functions are reversed.



PLS-PPH

Features


- > Assembly from outside
- > Level Sensors for horizontal mounting
- > Polypropylene housing
- > Covers a wide range of applications



PLS-092A-3PPH		
Contact form		A
Contact rating max.	W / VA	10
Switching current max.	A	1
Carry current max.	A	1.2
Switching voltage max.	VDC	200
	VAC	140
Breakdown voltage min.	VDC	240
Operating Temperature	°C	-20 to +65
UL / CSA / RoHS		--/--/•
Housing material		PP
Cable type		UL 2464, AWG 22

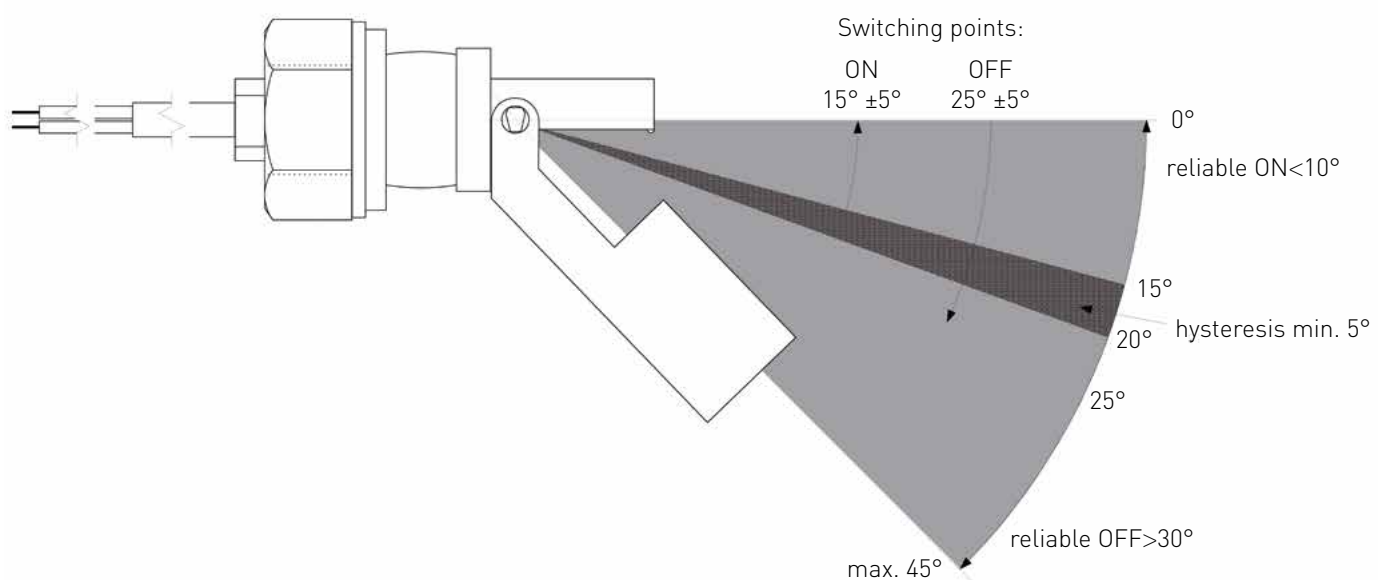
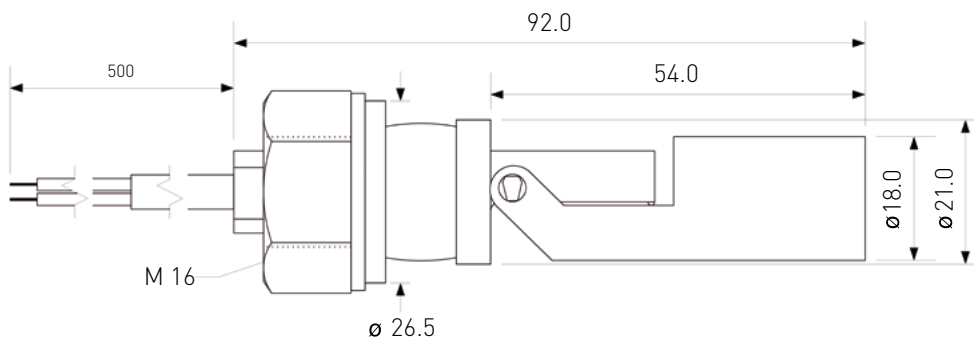


Hall Sensors Basics

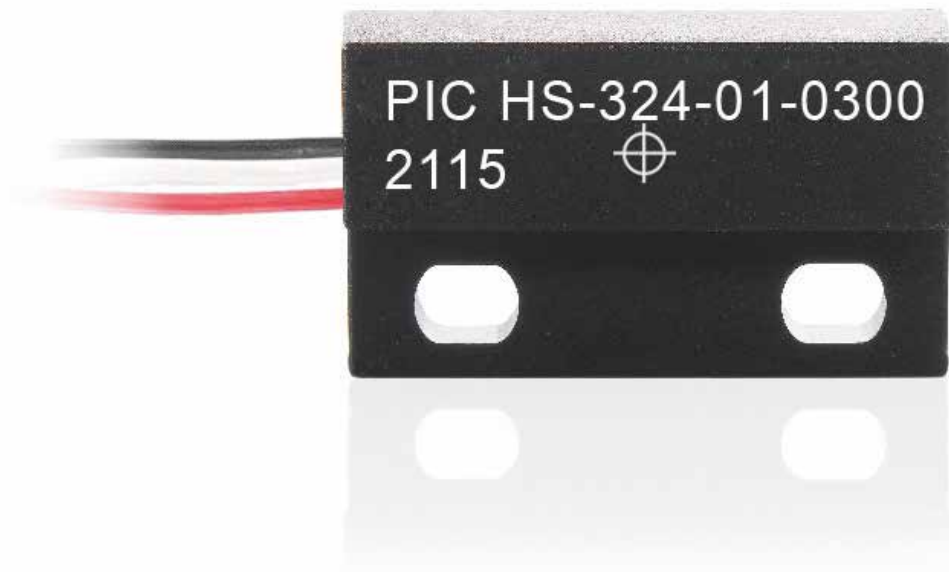

How does a Hall Sensor work?

A Hall Sensor contains an IC which reacts to a magnetic field by changing its output status. This change can be interpreted as ON/OFF signal by a logic.

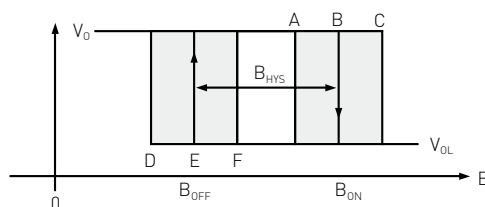


Benefits

- > No mechanical movement, basically no wear
- > Higher "switching frequency" compared to Reed Sensors
- > Mechanically protected
- > Easy assembly

Applications



Flatpack

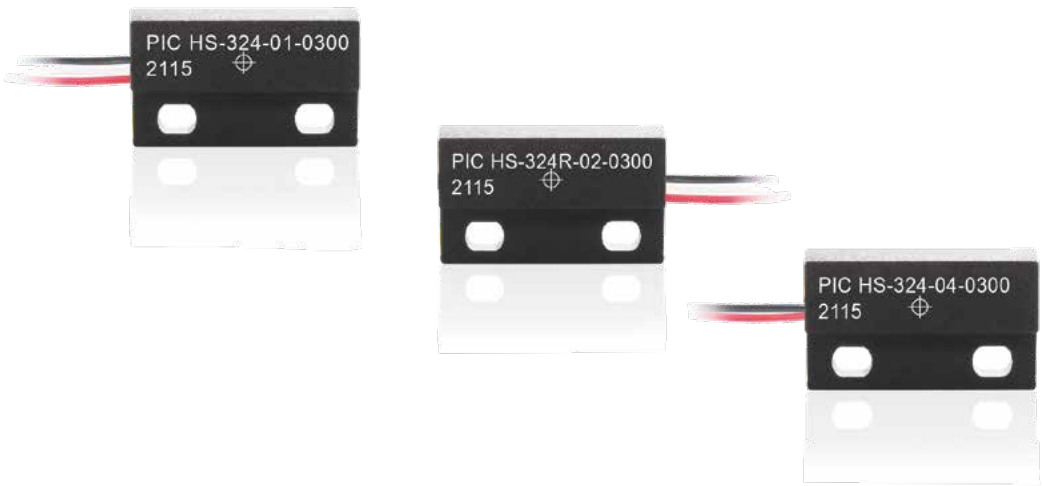


Features


- > Compact housing
- > Ideal sensing point marked
- > Various chip positions inside the housing possible

		HS-324-01 HS-324R-01	HS-324-02 HS-324R-02	HS-324-03 HS-324R-03	HS-324-04 HS-324R-04	HS-324-05 HS-324R-05
Type		Bipolar	Latching	Unipolar	Latching	Unipolar
Wires		3 wire	3 wire	3 wire	2 wire	2 wire
B _{on} / B _{off}	mT	0.5 / -0.5	2.5 / -2.5	5.5 / 3.5	12.0 / -12.0	6.0 / 4.0
Supply current I _s max	mA	2.4	2.4	2.4	5	2
Supply voltage min	V	2.7	2.7	2.7	3.0	3.0
Operating temperature	°C	-20 to +85				
Housing Material		ABS				
Cable type		UL1007, AWG 24				

HS-324

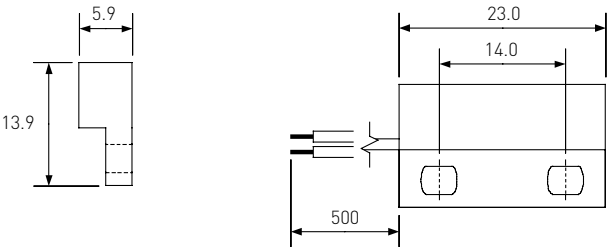


HS-324R



Tubular Threaded


Features

- Adjustable switching point
- Rugged design
- Ideal sensing point on front side

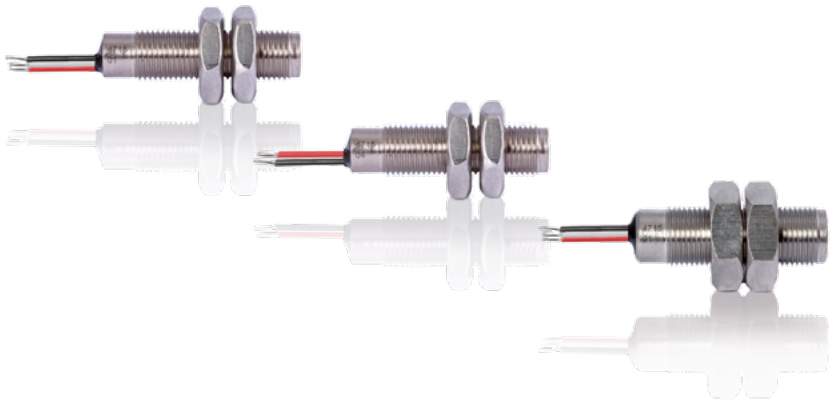


		HS-2210M-01 HS-2212M-01	HS-2210M-02 HS-2212M-02	HS-2210M-03 HS-2212M-03	HS-2210M-04 HS-2212M-04	HS-2210M-05 HS-2212M-05
Type		Bipolar	Latching	Unipolar	Latching	Unipolar
Wires		3 wire	3 wire	3 wire	2 wire	2 wire
B _{on} / B _{off}	mT	0.5 / -0.5	2.5 / -2.5	5.5 / 3.5	12.0 / -12.0	6.0 / 4.0
Supply current I _s max	mA	2.4	2.4	2.4	5	2
Supply voltage min	V	2.7	2.7	2.7	3.0	3.0
Operating temperature	°C	-20 to +85				
Housing Material		Nickel plated brass				
Cable type		UL1007, AWG 24				

HS-2210M

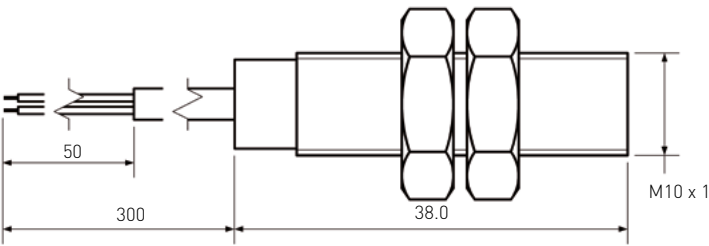

HS-2212M

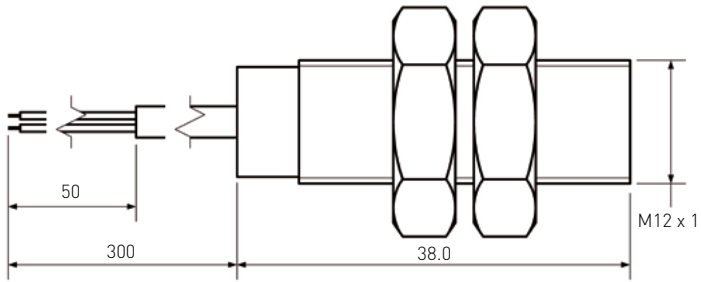

Flange Mount




Features


- Ultra compact housing
- Various sensitivities
- Customized types available

		HS-3511-01	HS-3511-02	HS-3511-03	HS-3511-04	HS-3511-05
Type		Bipolar	Latching	Unipolar	Latching	Unipolar
Wires		3 wire	3 wire	3 wire	2 wire	2 wire
B _{on} / B _{off}	mT	0.5 / -0.5	2.5 / -2.5	5.5 / 3.5	12.0 / -12.0	6.0 / 4.0
Supply current I _s max	mA	2.4	2.4	2.4	5	2
Supply voltage min	V	2.7	2.7	2.7	3.0	3.0
Operating temperature	°C	-20 to +85				
Housing Material		PA6				
Cable type		UL1569, AWG 24				

HS-3511
3-wire

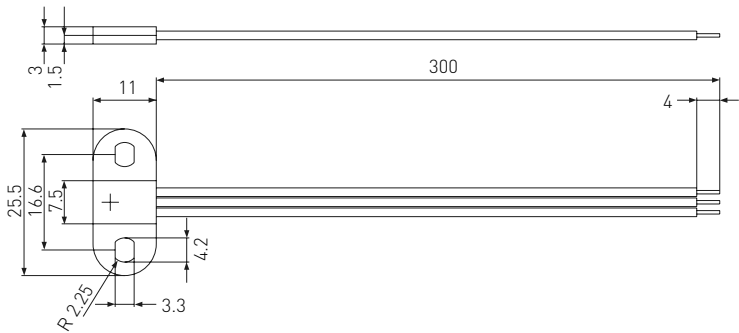

HS-3511
2-wire

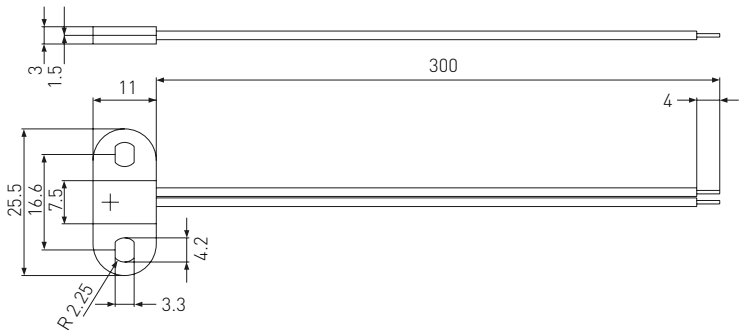

Actuators


Features

- Easily mountable
- Matches chosen Sensor
- Mechanically protected
- Customized types available




		MSM-225	MSM-226M	MSM-228	MSM-228M	MSM-2210M	MSM-2212M
Remanence Br	mT	1105	1105	1190	1190	1105	1105
Coercivity HcB	kA/m	836	836	828	828	836	836
Coercivity HcJ	kA/m	1274	1274	1274	1274	1274	1274
Energy Product (BH) max.	kJ/m³	235	235	275	235	235	235
Magnetic moment M	$\times 10^{-5}$ Vs cm	1.21	14.6	1.5	25.5	43.6	43.6
Operating Temperature max.	°C	85	85	85	85	85	85
UL / CSA / RoHS		--/--/•	--/--/•	--/--/•	--/--/•	--/--/•	--/--/•
Housing material		Nickel plated brass	Nickel plated brass	PA6-GF	Nickel plated brass	Nickel plated brass	Nickel plated brass


MSM-225




MSM-226M




MSM-228




MSM-228M



MSM-2210M




MSM-2212M






		MSM-2431	MSM-313	MSM-320	MSM-324	MSM-328	MSM-332
Remanence Br	mT	1190	1395	1190	1105	1105	1105
Coercivity HcB	kA/m	870	955	-	836	836	836
Coercivity HcJ	kA/m	1350	1353	1512	1274	1274	1274
Energy Product (BH) max.	kJ/m³	275	378	275	235	235	235
Magnetic moment M	$\times 10^{-5}$ Vs cm	10.0	0.3	2.4	3.42	3.42	4.1
Operating Temperature max.	°C	85	85	85	85	85	85
UL / CSA / RoHS		--/--/•	--/--/•	--/--/•	--/--/•	--/--/•	--/--/•
Housing material		PA-GF	ABS	PA66-GF	ABS	PA66-GF	ABS


MSM-2431

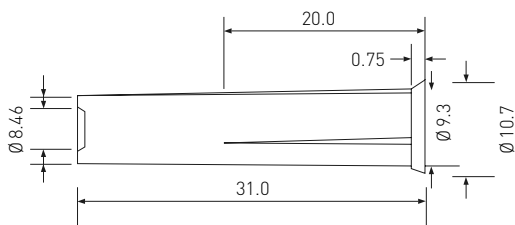


MSM-313




MSM-320

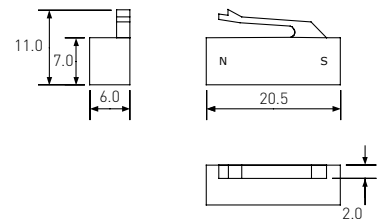


MSM-324



MSM-328

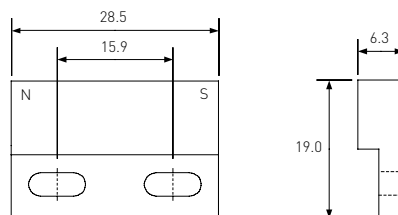

MSM-332

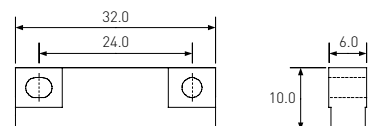

Selection Guide	LOW HIGH			
Costs	Ferrite	AlNiCo	NdFeB	SmCo
Energy Product	Ferrite	AlNiCo	SmCo	NdFeB
Operating Temperature	NdFeB	Ferrite	SmCo	AlNiCo
Corrosion Resistance	NdFeB	SmCo	AlNiCo	Ferrite
Resistance to Demagnetization	AlNiCo	Ferrite	NdFeB	SmCo
Mechanical Strength	Ferrite	SmCo	NdFeB	AlNiCo
Temperature Coefficient	AlNiCo	SmCo	NdFeB	Ferrite

In recent years, Neodymium-Iron-Boron magnets (NdFeB) have advanced from being exotic luxury items to affordable power magnets.



- > Increased switching distance
- > Miniature design possible
- > Resistance to demagnetization
- > Greater product design flexibility

Material Grades		Remanence Br	Coercivity HcB HcJ		Energy Product (BH) max.	Operating Temperature max.
			<i>mT</i>	<i>kA/m</i>		
NdFeB	N30	1105	836	955	235	80
	N30H	1105	836	1274	235	120
	N30SH	1100	836	1512	239	150
	N33EH	1185	828	955	275	180
	N35	1185	828	955	275	80
	N35H	1190	828	1274	275	120
	N35SH	1190	828	1512	275	150
	N40SH	1260	844	1512	314	150
	N45	1350	840	955	354	80
	N48H	1395	955	1353	378	120
SmCo5	S20	875	617	1194	159	250
Sm2Co17	S24H	975	724	1433	183	300
	S28H	1065	724	1433	215	300
AlNiCo	A500	1281	50	52	40	500
Ferrite	Y10	215	143	203	8	250
	Y30BH	390	229	231	29	300
	Y35	410	183	167	31	300
Bonded Ferrite	FB1	240	171	225	11	80
Bonded NdFeB	BN8	575	378	1035	64	150

Typical values, may vary!

Over 80% of our products are *special custom designs*.

Connectors and cable assemblies

- › Sensor solutions + wire harnesses:
taylor made to your requirements including
RAST-Assembly




Special housings

- › Own molding facilities spell flexibility when
it comes to special housings, snap-fit solutions
and inserts.



PCB-Assemblies

- › Where large quantities in particular are concerned,
assembly costs can make or break a product.
We will be happy to supply Reed Switches and other
components as fully assembled PCBs including
cable and connector at highly competitive prices.

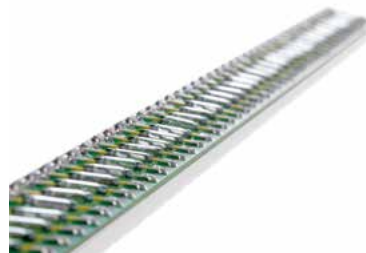

Customized Level Sensors

- › We can do much more than what
you see in this catalogue.



Magnets


- › We design the matching actuator magnet
for your application - bare or cased.




How to operate

In general **four** different magnet approaches are known when using permanent magnets


- 1 **One magnet pole** faces Reed Switch providing **two** operations max. when moving on X-axis. Minimum movement of magnet over switch center provides smallest possible switching differential.

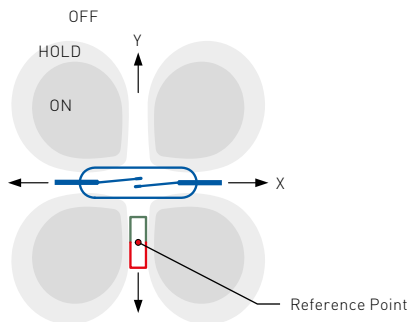


- 2 **Magnet parallel to longitudinal axis of switch:** Approaching magnet **vertically** to switch on Y-axis provides **one** operation only. Driving magnet over full length of switch (X-axis) may result in up to three operations. Minimum movement of magnet over switch center provides smallest possible switching differential.

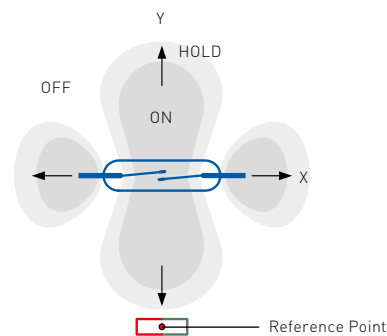

- 3 Switch operation by **rotation** of magnet. This gives two operations per complete rotation.

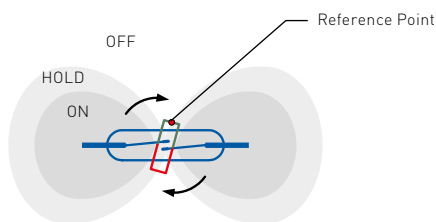

- 4 Operation of switch by **shielding**. This method requires a permanently opposite location of magnet and switch. The switch is held closed continuously and will release only if magnet flux is removed by means of ferro-magnetic shield.

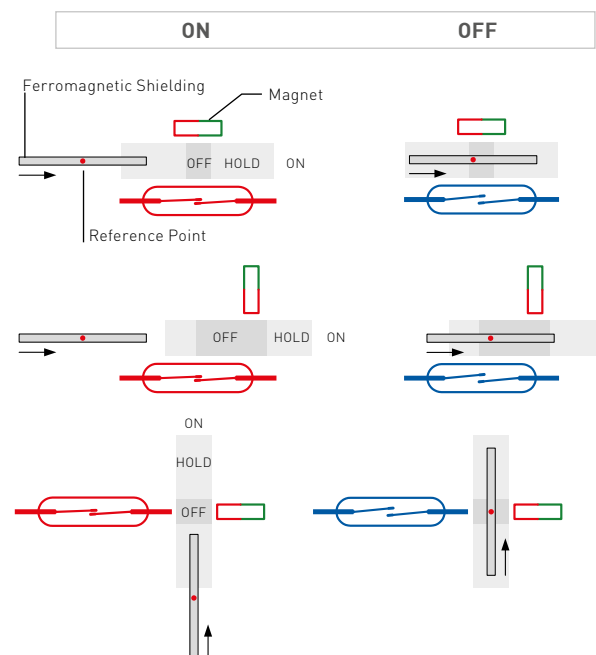


Check out our interactive Reed Switch here:
www.pic-gmbh.com/go

Precautions

Shock Resistance


Generally Reed Switches provide high shock resistance up to 100 g. Still a drop on a hard surface can generate a shock of several 100 g, which can lead to de-adjustment of contacts. Switches having been dropped should be re-tested for sensitivity before usage!




Do's and Don'ts when cutting and bending Reed Switches

Incorrect bending or cutting of terminals may lead to cracks in the sealing area due to heavy mechanical stress. To avoid this problem the remaining part of terminal between glass body and point of bending resp. cutting, should be gripped tightly.

Cutting



shock




shock


Forces directed away from Reed Switch

Forces directed toward Reed Switch!


Bending




Terminal gripped
tightly between
glass body and
point of bending



Terminal
not gripped




Gripped on
glass body




Terminal not
gripped between
glass body and
point of bending

Dimensioning of modified Reed Switches

We supply Reed Switches with terminals modified to nearly any requirement. Dimensioning should be made according to the examples below.




a) cut

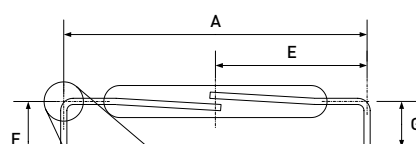

b) cut & bent

center wire

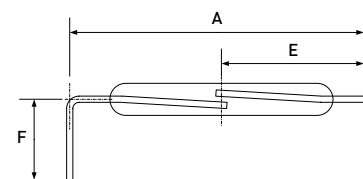

c) cut & bent




Chemical resistance chart

+ = Excellent o = Limited - = Poor	Chemical resistance @20°C / @60°C				
	ABS	PA	PP	POM	Stainless Steel 304
Acetic Acid, dilute	- / -	- / -	+ / +	+ / o	+ / +
Acetone	- / -	+ / +	+ / o	+ / o	+ / +
Ammonium Hydroxide	o / -	+ / +	+ / +	+ / +	+ / +
Aniline	- / -	o / -	+ / +	- / -	+ / +
Beer, Wine, Whiskey	+ / +	+ / +	+ / +	+ / +	+ / +
Butanol	+ / o	+ / +	+ / +	+ / o	+ / +
Chloroform	- / -	- / -	- / -	- / -	+ / +
Citric Acid	+ / +	+ / +	+ / +	+ / -	o / o
Copper Sulphate	+ / +	- / -	+ / +	+ / +	o / o
Detergents	+ / o	+ / o	+ / +	+ / +	+ / +
Diesel fuel	+ / +	o / o	+ / o	+ / +	+ / +
Ethanol	+ / +	+ / +	+ / +	+ / +	+ / +
Ethylene Glycol	+ / +	+ / +	+ / +	+ / o	+ / +
Ferric Chloride	+ / +	- / -	+ / +	- / -	- / -
Formaldehyde (Formalin)	+ / +	o / o	+ / +	+ / +	+ / +
Formic Acid	+ / o	- / -	+ / +	- / -	+ / o
Fruit Juice	+ / +	+ / +	+ / +	+ / -	+ / +
Gasoline	- / -	- / -	- / -	+ / +	+ / +
Glycerol (Glycerin)	+ / +	+ / +	+ / +	+ / +	+ / +
Hydrochloric Acid	+ / -	- / -	+ / +	- / -	- / -
Hydrogen Peroxide, dilute	- / -	- / -	+ / +	o / -	+ / +
Lactic Acid	+ / +	o / -	+ / +	+ / -	+ / o
Methanol	- / -	o / -	+ / +	+ / +	+ / +
Milk	+ / o	+ / +	+ / +	+ / +	+ / +
Mineral Oil	+ / +	+ / +	+ / +	+ / +	+ / +
Nitric Acid, dilute	- / -	- / -	+ / +	- / -	+ / o
Nitrobenzene	- / -	- / -	+ / +	+ / -	+ / +
Phosphoric Acid, dilute	+ / +	- / -	+ / +	+ / -	o / -
Propanol (IPA)	o / -	+ / +	+ / +	+ / +	o / o
Silver Nitrate	+ / o	o / -	+ / +	+ / -	+ / +
Soaps	+ / +	+ / +	+ / +	+ / +	+ / +
Sodium Hydroxide, dilute	+ / +	o / -	+ / +	+ / +	+ / +
Sulphuric Acid, dilute	o / -	- / -	+ / +	o / -	o / -
Urine	+ / +	+ / +	+ / +	+ / +	+ / +
Vegetable Oil	+ / o	+ / +	+ / +	+ / +	+ / +
Water	+ / +	+ / o	+ / +	+ / +	+ / +
Water, Sea-, Salt-	+ / +	+ / o	+ / +	+ / +	- / -

Above data is intended only as a guide for chemical compatibility.

We do not assume any liability for the accuracy of the information.

It is strongly recommended that users perform their own tests to determine suitability of material.

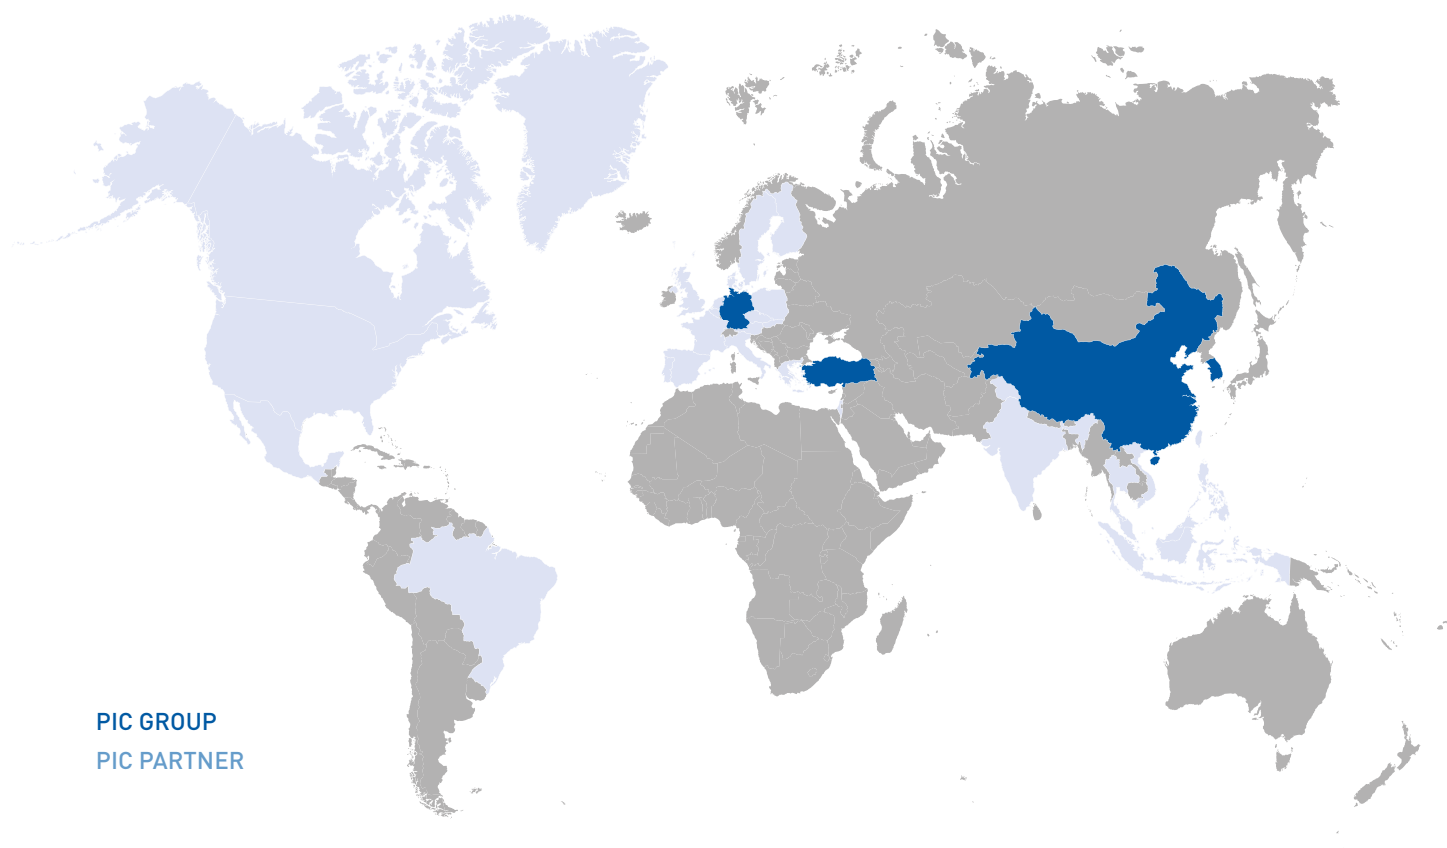

PIC GROUP
PIC PARTNER

Production

PIC Sensors Zhuhai Ltd.
CHINA (PRC)

PIC Sensör Sanayi Tic. Ltd.
TURKEY

Sales Office

PIC Sensors Korea Inc.
SOUTH KOREA

PIC Sensors Asia Ltd.
HONG KONG (SAR)

Headquarter

PIC GmbH
Nibelungenstr. 5A
90530 Wendelstein
Germany
Tel. +49 911 995906-0
Fax +49 911 995906-99
eMail info@pic-gmbh.com
www.pic-gmbh.com

© PIC GmbH, 2018



